

SPARKPLUGS®

DISPOSABLE FOAM EARPLUGS

6654 SparkPlugs
Corded

NRR
33
dB



6604 SparkPlugs
Uncorded



6615 SparkPlugs
Metal Detectable
Corded

SOFT COMFORTABLE FIT

SparkPlugs earplugs are made of extra-soft, extra-light foam. Their tapered shape fits easily in the ear canal, and seals gently and snugly without pressure. They're so comfortable you'll forget you're wearing earplugs.

INDEPENDENTLY TESTED: NRR 33

SparkPlugs earplugs offer a high NRR 33, making them suitable for most noisy environments. So, while they look like fun, they provide serious protection.

METAL DETECTABLE VERSION

SparkPlugs also come in a metal detectable version which has a new metal detectable cord. The bright blue color is perfect for food processing applications. The enclosed metal ball bearing eliminates any exposed metal. The ball bearing and cord are in separate holes so that the earplugs remain detectable even if the cord is removed. The earplugs are corded to prevent earplug loss.

AVAILABLE IN PLUGSTATION DISPENSER

Moldex offers the convenience, increased compliance and cost savings of our popular earplug dispenser, the PlugStation®, with several versions of the SparkPlugs foam earplugs – Uncorded, Corded, and Metal Detectable. With the PlugStation you can afford to put earplugs in all the places they're needed. PlugStation's convenience, ease of use, and high visibility lead to higher compliance and by giving quick access to workers. It also saves worktime.

- Compliance — High visibility to increase awareness for your hearing conservation program.
- Convenience — Hang a PlugStation anywhere plugs are needed.
- Cost Savings — Workers take one pair at a time so there are no wasteful grabbing of multiple pairs.

FEATURES

- Extra-soft, low-pressure foam for comfort and fit.
- Tapered shape for easy insertion and removal.
- Shaped to fit even very small ear canals.
- Non-irritating smooth surface.
- In the Metal Detectable version the plug and cord are independently detectable for added safety.
- Look for the exclusive colored streaks and swirls as a symbol of Moldex quality.
- Independently tested to ANSI S3.19-1974.
- 100% PVC-Free.



6644 SparkPlugs,
PlugStation
Uncorded / 200 Pairs



6645 SparkPlugs,
PlugStation
Uncorded / 500 Pairs



6880 SparkPlugs,
PlugStation
Corded / 150 Pairs



6881 SparkPlugs
Metal Detectable,
PlugStation
Corded / 150 Pairs



6605 SparkPlugs
Uncorded Packaged
PlugStation
250 Pairs



DISTRIBUTED BY:
Pro Wood Finishes
14622 Southlawn Lane
Rockville MD 20850
Ph: (301) 424-3033

DISPOSABLE FOAM EARPLUGS

PART # / DESCRIPTION	DISPLAY	CASE
6604 SparkPlugs, Uncorded	200 Pairs per Box	10 Boxes per Case
6654 SparkPlugs, Corded	100 Pairs per Box	20 Boxes per Case
6615 SparkPlugs Metal Detectable, Corded	100 Pairs per Box	20 Boxes per Case
6644 SparkPlugs PlugStation, Uncorded	250 Pairs per Dispenser	6 Dispensers per Case
6645 SparkPlugs PlugStation, Uncorded	500 Pairs per Dispenser	4 Dispensers per Case
6605 SparkPlugs, Uncorded Packaged	250 Pairs per Dispenser	4 Dispensers per Case
6680 SparkPlugs PlugStation, Corded	150 Pairs per Dispenser	4 Dispensers per Case
6681 SparkPlugs Metal Detectable PlugStation, Corded	150 Pairs per Dispenser	4 Dispensers per Case

ATTENUATION DATA

Tested According to ANSI Specs S3.19-1974 Michael & Assoc., State College, PA.

Frequency (Hz)	125	250	500	1000	2000	3150	4000	6300	8000		
Mean Attenuation (dB)	42.3	43.7	46.6	40.9	38.6	44.7	46.9	49.3	48.3	NRR 33	CSA AL
Standard Deviation (dB)	5.0	6.0	5.8	4.2	2.8	3.2	3.3	4.2	3.6		

WARNING TO USER

1. Use this laboratory-derived attenuation data for comparison purposes only. The amount of protection afforded in field use often is significantly lower depending on how the protectors are fitted and worn.
2. Failure to follow all instructions could result in hearing loss or injury.
3. Failure to obtain a proper fit will reduce effectiveness of hearing protectors and could result in hearing loss or injury.
4. SparkPlugs must only be used as part of a hearing conservation program that complies with applicable local safety and health regulations.
5. Overprotection can be dangerous. The wearer must be able to hear warning signals.
6. Wearers with hearing loss should exercise extreme caution.
7. It is the employer's responsibility to ensure that the type of hearing protector and its NRR is appropriate for the user in their particular workplace.
8. Use caution when working around machinery or other equipment to ensure neck cord does not become caught or entangled.
9. Failure to follow these warnings could result in serious injury or death.

MOLDEX TECHNICAL ASSISTANCE

Moldex provides all of the technical assistance required to set up a hearing protection program. For more information call +1 (800) 421-0668 or +1 (310) 837-6500 ext. 512/550 or E-mail: sales@moldex.com or visit www.moldex.com.

DISTRIBUTED BY:




MOLDEX-METRIC, INC.
 10111 West Jefferson Blvd.
 Culver City, CA 90232
 TEL: +1 (800) 421-0668 or
 +1 (310) 837-6500
 FAX: +1 (310) 837-9563
 E-mail: sales@moldex.com
www.moldex.com

CANADIAN CUSTOMER SERVICE
 Tel: +1 (800) 421-0668, Ext. 517
 Fax: +1 (310) 837-9563




Printed on Recycled Paper


HERE TODAY. HEAR TOMORROW.

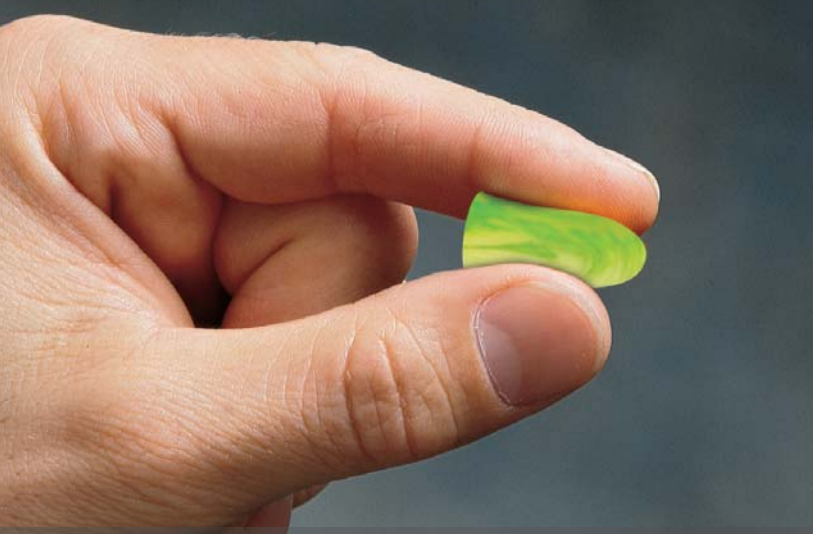

1. ROLL & COMPRESS. With clean hands, hold earplug between thumb and forefinger as shown. Roll and progressively compress the entire tapered end of the earplug to a small wrinkle-free cylinder.

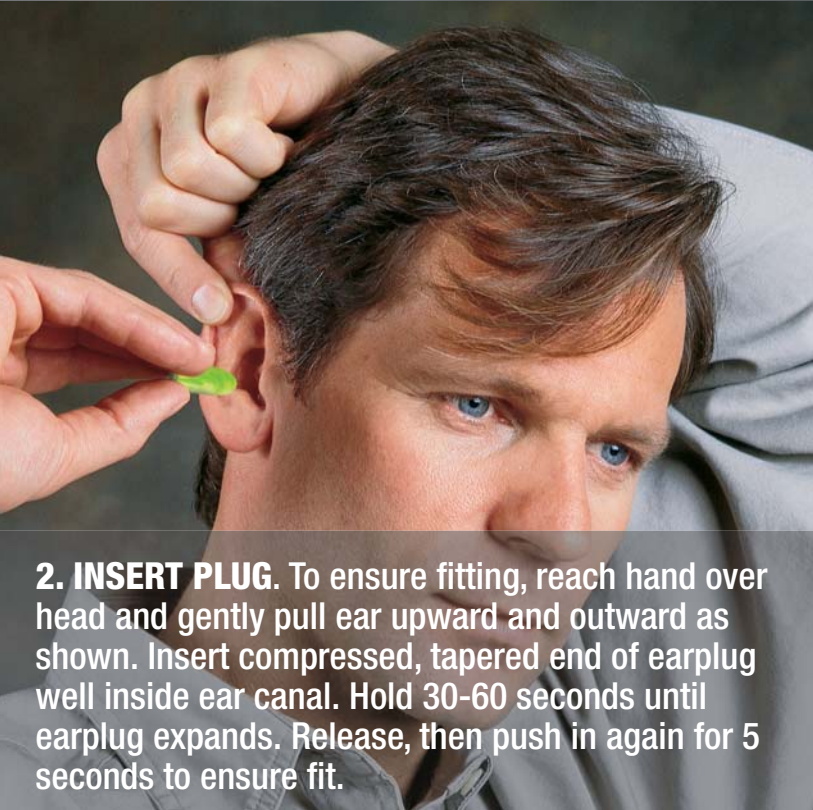

2. INSERT PLUG. To ensure fitting, reach hand over head and gently pull ear upward and outward as shown. Insert compressed, tapered end of earplug well inside ear canal. Hold 30-60 seconds until earplug expands. Release, then push in again for 5 seconds to ensure fit.

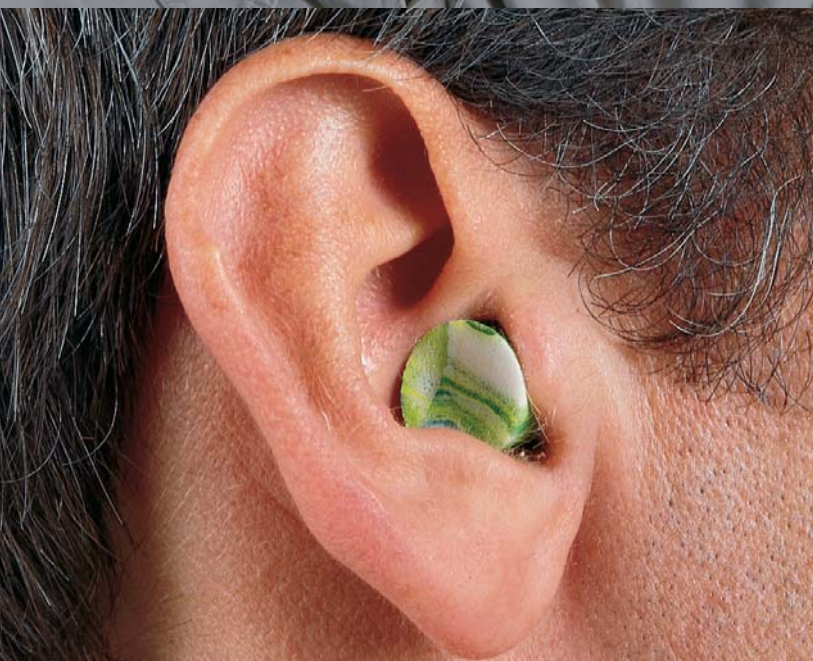

3. CORRECT FIT. When properly inserted, the bottom edge of earplug is located at the opening of the ear canal.



4. INCORRECT FIT. A portion of the earplug not in the ear canal will reduce effectiveness.



FITTING INSTRUCTIONS FOR DISPOSABLE FOAM EARPLUGS

WARNING

1. Use these laboratory derived attenuation data for comparison purposes only. The amount of protection afforded in field use often is significantly lower depending upon how the protectors are fitted and worn.
2. Failure to follow all instructions could result in hearing loss or injury.
3. Failure to obtain a proper fit will reduce effectiveness of hearing protectors and could result in hearing loss or injury.
4. Over protection can be dangerous. The wearer must be able to hear warning signals.
5. Wearers with hearing loss should exercise extreme caution.
6. It is the employer's responsibility to ensure that the type of hearing protector and its rating is appropriate for the user in their particular workplace.
7. Use caution when working around machinery or any other equipment to ensure neck cord does not become caught or entangled.
8. Failure to follow these warnings could result in serious injury or death.
9. Moldex earplugs must only be used as part of a hearing conservation program that complies with applicable local safety and health regulations.

For additional information, consult your Supervisor, read all information on box.
Moldex Technical Service Department: +1 (800) 421-0668 ext. 550 or +1 (310) 837-6500 ext. 550 or visit www.moldex.com

MOLDEX-METRIC, INC.
10111 W. Jefferson Blvd., Culver City, CA 90232
TEL +1 (800) 421-0668 or +1 (310) 837-6500
FAX +1 (310) 837-9563
E-mail: sales@moldex.com www.moldex.com

9700-760 REV G 04/16



MOLDEX
Ideas that wear well.