

# Technical Data Sheet



Eclectic Products, Inc.  
Manufacturing Facility  
101 Dixie Mae Drive  
Pineville, Louisiana  
eclecticproducts.com  
800.349.4667

ISO 9001:2008  
Compliant  
Quality Management  
Systems

Administration Office  
Eugene, Oregon  
eclecticproducts.com  
800.693.4667



3.25 fl oz  
Net Wt 6 oz  
Net Wt 24 oz  
Gallon

# FAMOWOOD®

## LATEX WOOD FILLER

### PRODUCT DESCRIPTION

First choice of woodworking professionals for more than 70 years! Whether you are masking small or large defects, FAMOWOOD® can be used inside or outside and takes stains and paints evenly, making it ideal for any custom project. FAMOWOOD® spreads evenly into crack and holes without shrinking, crumbling or cracking. In addition, FAMOWOOD® requires very little sanding to achieve a desired finished look.

### WHERE TO USE / APPLICATIONS

Use to fill cracks or holes in wood. Spread evenly into cracks or hole, let dry and sand smooth to surface repaired. Paint or stain to match wood surface.

### FEATURES AND BENEFITS

**LOW ODOR/EASY CLEAN-UP** – latex formula

**ACTS LIKE REAL WOOD** – saw, drill, sand, plane and nail

**INTERIOR/EXTERIOR** – use indoors or outdoors

**WON'T CRACK OR SHRINK** – spread evenly into cracks and holes without crumbling or cracking

**SUPERIOR STRENGTH** – hard finish with little or no shrinkage

**QUALITY FINISH** – takes stains and paints evenly with minimal sanding




## TECHNICAL INFORMATION

### PHYSICAL PROPERTIES

Colors (10):	Birch, Cherry/Dark Mahogany, Fir/Maple, Golden Oak, Natural, Oak, Red Oak, Walnut, White, White Pine
VOC:	269 gram/liter
Density:	15.0 – 16.0 lbs/gal
Solids:	82% +/- 2.0% (by weight)
Application Temperature:	40 to 90 °F (4 to 32 °C)
Service Temperature:	10 to 150 °F (-12 to 66 °C)
Storage Temperature:	Store between 45 and 85 °F (7 and 29 °C)
Freeze/thaw stability:	Stable up to three to five freezes; allow product to warm to room temperature before using
Shelf life:	1 year

## TEST RESULTS: FAMOWOOD vs. COMPETITION

### APPLIED FORCE NEEDED TO CAUSE WOOD FILLER POP OUTS

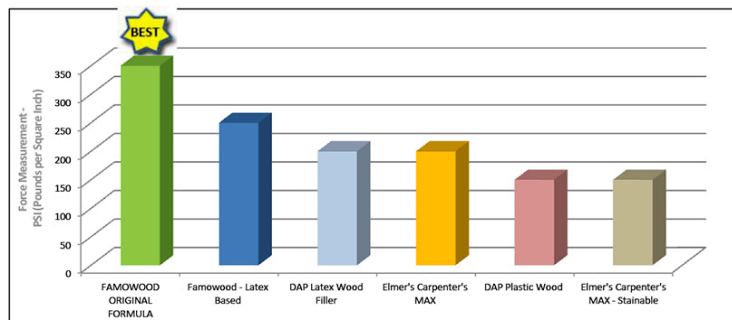

### BETTER ADHESION = NO POP OUTS!

Psi (pounds per square inch). ASTM D 4541-93. Average adhesion strength in a ¼" deep x 2" diameter defect (Average of 5 samples).

---

## Technical Data Sheet

---



3.25 fl oz  
Net Wt 6 oz  
Net Wt 24 oz  
Gallon

# FAMOWOOD®

---

## LATEX WOOD FILLER

### STAINABILITY

Wood Filler	Stain Quality
FAMOWOOD ORIGINAL FORMULA	Stains Well
FAMOWOOD LATEX BASED	Stains Well
DAP Plastic Wood	Stains Well
Elmer's Carpenter's MAX – Stainable	Stains Well
DAP Latex Wood Filler	Resists Stains
Elmer's Carpenter's MAX	Resists Stains

---

### DIRECTIONS and APPLICATION NOTES

---

Always test a small area before full use.

- Step 1 Surface must be clean and dry.
- Step 2 Do not apply below 40 °F / 4 °C.
- Step 3 Allow contents to dry thoroughly before sanding (approx. 30 minutes).
- Step 4 Wear dust mask.
- Step 5 Accepts most water-based and oil-based stains.
- NOTE:** TEST STAIN COMPATABILITY BEFORE USE.
- Step 6 For deep repairs: allow 1<sup>st</sup> layer to dry before applying subsequent layers.
- Step 7 Replace lid tightly.
- Step 8 KEEP FROM FREEZING.

---

### HEALTH and SAFETY

---

This product contains a chemical known to the State of California to cause cancer. Avoid inhalation of dust from sanding. If ventilation is inadequate while sanding, use a respirator to protect against dust inhalation. Use with adequate ventilation.

First Aid: In case of eye contact, flush eyes with water for 10 minutes. Keep out of reach of children.

Before working with this product, read and become familiar with information concerning hazards, proper use and handling. MSDS is available on line at:

[eclecticproducts.com/msds/fw\\_wb\\_wf\\_english.pdf](http://eclecticproducts.com/msds/fw_wb_wf_english.pdf); to request an MSDS, please send an e-mail to [msds@eclecticproducts.com](mailto:msds@eclecticproducts.com) or call 800.333.9826.

---

### LIMITED WARRANTY

---

The product is warranted against any defect in materials or workmanship under normal use for a period of 180 days after the date of purchase. The product is also warranted under any implied warranties provided under applicable state law, including, without limitation, the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, for a period of 180 days after the date of purchase. This warranty covers only the original buyer of the product. For warranty service, the buyer should contact the store where the product was purchased, or write Eclectic Products, Inc., P.O. Box 4450, Pineville LA 71361 or call 800.767.4667. This warranty gives you specific legal rights, and you also have other rights, which vary from state to state.

**DISTRIBUTED BY:**  
**Pro Wood Finishes**  
**14622 Southlawn Lane**  
**Rockville MD 20850**  
**Ph: (301) 424-3033**