

# Technical Data Sheet



Eclectic Products, Inc.  
Manufacturing Facility  
101 Dixie Mae Drive  
Pineville, Louisiana  
eclecticproducts.com  
800.349.4667

ISO 9001:2008  
Compliant  
Quality Management  
Systems

Administration Office  
Eugene, Oregon  
eclecticproducts.com  
800.693.4667



Net Wt 6 oz

Net Wt 23 oz

Net Wt 45 oz (not shown)

Gallon

# FAMOWOOD®

## ORIGINAL WOOD FILLER

### PRODUCT DESCRIPTION

First choice of woodworking professionals for more than 70 years! Whether you are masking small or large defects, FAMOWOOD® can be used inside or outside and takes stains and paints evenly, making it ideal for any custom project. FAMOWOOD® spreads evenly into crack and holes without shrinking, crumbling or cracking. In addition, FAMOWOOD® requires very little sanding to achieve a desired finished look.

### WHERE TO USE / APPLICATIONS

Use to fill cracks or holes in wood. Spread evenly into cracks or hole, let dry and sand smooth to surface repaired. Paint or stain to match wood surface.

### FEATURES AND BENEFITS

**ACTS LIKE REAL WOOD** – saw, drill, sand, plane and nail

**INTERIOR/EXTERIOR** – use indoors or outdoors

**WON'T CRACK OR SHRINK** – spread evenly into cracks and holes without crumbling or cracking

**SUPERIOR STRENGTH** – hard finish with little or no shrinkage

**QUALITY FINISH** – takes stains and paints evenly with minimal sanding




## TECHNICAL INFORMATION

### PHYSICAL PROPERTIES

Colors (16):	Alder, Ash, Birch, Cedar, Cherry, Fir, Mahogany, Maple, Natural/Tupelo, Oak/Teak, Pine, Red Oak, Walnut, White, White Pine, White Glaze
VOC:	255 gram/liter
Solvent:	Acetone, Methyl Ethyl Ketone and Petroleum Distillate
Density:	13.9 lbs/gal
Solids:	79% +/- 1.0% (by weight)
Vehicle:	Nitrocellulose Lacquer
Application Temperature:	40 to 80 °F (4 to 27 °C)
Service Temperature:	10 to 150 °F (-12 to 66 °C)
Storage Temperature:	Store between 45 and 85 °F (7 and 29 °C)
Freeze/thaw stability:	None; do not freeze
Shelf life:	1 year

## TEST RESULTS: FAMOWOOD vs. COMPETITION

### APPLIED FORCE NEEDED TO CAUSE WOOD FILLER POP OUTS

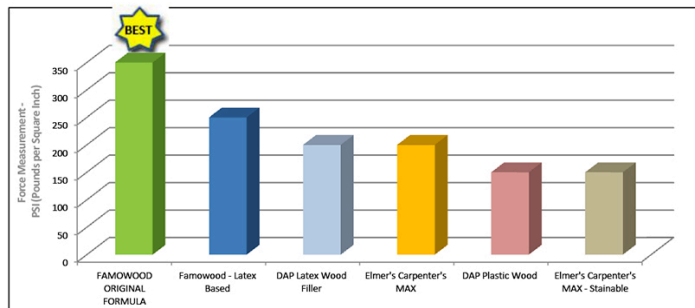

### BETTER ADHESION = NO POP OUTS!

Psi (pounds per square inch). ASTM D 4541-93. Average adhesion strength in a ¼" deep x 2" diameter defect (Average of 5 samples).


# Technical Data Sheet

# FAMOWOOD® ORIGINAL WOOD FILLER



Net Wt 6 oz  
Net Wt 23 oz  
Net Wt 45 oz (not shown)  
Gallon

## PERCENT SHRINKAGE

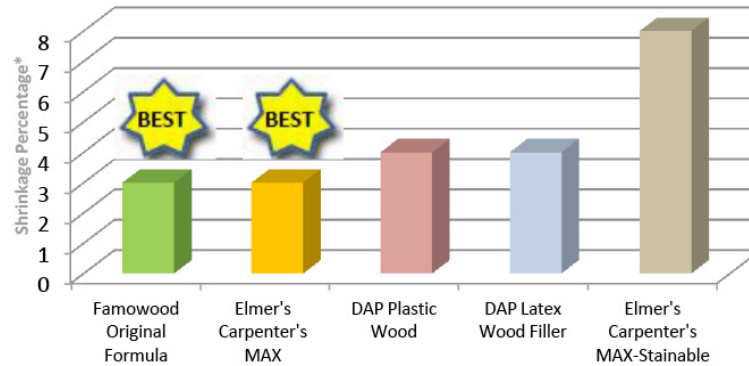

\*Volume was measured on a lab scale using the following formula:  
 $(Initial\ Volume - Final\ Volume) / Initial\ volume \times 100 = Percent\ Shrinkage$

## STAINABILITY

Wood Filler	Stain Quality
FAMOWOOD ORIGINAL FORMULA	Stains Well
FAMOWOOD LATEX BASED	Stains Well
DAP Plastic Wood	Stains Well
Elmer's Carpenter's MAX – Stainable	Stains Well
DAP Latex Wood Filler	Resists Stains
Elmer's Carpenter's MAX	Resists Stains

## DIRECTIONS and APPLICATION NOTES

Always test a small area before full use.

- Step 1 Surface must be clean and dry.
- Step 2 Allow contents to dry thoroughly before sanding (approx. 30 minutes).
- Step 3 Accepts most water-based and oil-based stains.
- NOTE:** TEST STAIN COMPATIBILITY BEFORE USE.
- Step 4 For deep repairs: allow 1<sup>st</sup> layer to dry before applying subsequent layers.
- Step 5 Replace lid tightly.
- Step 6 Use FAMOWOOD Wood Filler Thinner to restore to original consistency or for clean-up.

## HEALTH and SAFETY

This product contains a chemical known to the State of California to cause cancer. Avoid inhalation of dust from sanding. If ventilation is inadequate while sanding, use a respirator to protect against dust inhalation. Keep away from heat, spark and flame. Use with adequate ventilation. Avoid breathing vapors. Open windows and doors during application and curing. Avoid contact with eyes and skin.

Before working with this product, read and become familiar with information concerning hazards, proper use and handling. MSDS is available on line at:

[eclecticproducts.com/msds/fw\\_sb\\_wf\\_english.pdf](http://eclecticproducts.com/msds/fw_sb_wf_english.pdf); to request an MSDS, please send an e-mail to [msds@eclecticproducts.com](mailto:msds@eclecticproducts.com) or call 800.333.9826.

---

**LIMITED WARRANTY**

---

The product is warranted against any defect in materials or workmanship under normal use for a period of 180 days after the date of purchase. The product is also warranted under any implied warranties provided under applicable state law, including, without limitation, the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, for a period of 180 days after the date of purchase. This warranty covers only the original buyer of the product. For warranty service, the buyer should contact the store where the product was purchased, or write Eclectic Products, Inc., P.O. Box 4450, Pineville LA 71361 or call 800.767.4667. This warranty gives you specific legal rights, and you also have other rights, which vary from state to state.

**DISTRIBUTED BY:  
Pro Wood Finishes  
14622 Southlawn Lane  
Rockville MD 20850  
Ph: (301) 424-3033**