

DISTRIBUTED BY:
Pro Wood Finishes
14622 Southlawn Lane
Rockville MD 20850
Ph: (301) 424-3033

BINKS®

BINKS TROPHY SERIES

Manual and Touch-Up Spray Guns



Binks Trophy Series Spray Guns are the premier spray guns for use in pressure, gravity and suction applications. The lightweight and ergonomic design provides unsurpassed comfort and control. The large selection of fluid nozzles and needle materials means that this versatile gun range can be used on almost any coating application. Available in HVLP, LVMP (Trans-Tech) or CONventional spray technologies, these guns incorporate the latest advanced atomisation technology. Use the Binks Trophy Series Spray guns to achieve a consistent fine finish with a wide range of industrial coatings.

Applications

The Binks Trophy Series Spray guns are ideal for a wide variety of materials and viscosities. These versatile guns can be used in all types of industrial applications.

Binks Trophy Finishes *AT THE FRONT* when spraying metals, plastics, wood, ceramic, composite and other substrates.

Manual and Touch-up Spray Guns

A great finish for every size job and every size part

HVLP (Blue), LVMP (Green) and CONventional (Brown) Technologies

For optimal air cap performance while meeting environmental requirements

Pressure, Gravity and Suction Models

Will meet the needs of all applications

Fewer Gun Parts

Reduced maintenance, downtime and lower running costs

Longer Wearing Fluid Components

Reduce the cost of owning and maintaining your Trophy spray guns

BINKS®
TROPHY SERIES

finishingbrands.eu





SPRAY GUNS ARE AVAILABLE IN EVERY TECHNOLOGY.

Binks has developed a broad selection of spray guns, air caps and fluid tips to provide users with the right gun with the perfect air cap for the job.

The completely new air cap designs provide uniform spray patterns with consistent atomisation from top to bottom.

Trophy spray guns are available in these Technologies:

LVMP (Green) – (Trans-Tech) Provides equal to or greater transfer efficiency at slightly higher air pressures than HVLP

CONVENTIONAL (Brown) – For spray applications requiring higher air pressure. Also suitable for viscous material set-ups.

HVLP (Blue) – Air pressure is less than 10 PSI at the air cap meeting all European and USA standards and regulatory requirements.

Why We Took Ergonomics So Seriously

Binks Trophy Series Spray Guns feel different by design. They're lighter and are easier to handle over longer periods of time. That means operators can spray for longer periods with less fatigue and injury. This can make a big difference to productivity and your profitability. That's why we take ergonomics so seriously.

1. LIGHT WEIGHT – one of the lightest, top quality spray gun range available.

2. DESIGNED FOR THE HAND – our gun designers tested a variety of hand sizes and grips to come up with the ideal design for the Trophy. The form is ultimately about function and reduced stress.

3. TRIGGER PULL – the easy light trigger pull action is created by the unique, built-in stabilisation features.

4. NO KICK AIR VALVE – delivers the smoothest pull on the market. Virtually eliminates any recoil from triggering.

5. KNOBS AND AIR CAP RINGS – all the hand adjustments have been designed and manufactured to make it virtually effortless to "dial -in" your settings or remove parts for maintenance or substitution.

A FULL LINE OF BINKS TROPHY EXTENSIONS ARE AVAILABLE

Fluid Tips and Needles – Binks Trophy Series Spray Guns utilise a wide variety of fluid tips and needles designed and manufactured to handle a broad range of application materials. These include:

TUFF TIP (supplied as standard) – Our stainless steel fluid nozzles are hardened and last 20% longer.* The stainless steel fluid nozzles are used for general purpose, to apply a wide variety of coatings.

- Size range: 0.5mm to 2.6mm

Plastic – Plastic needles are typically used for very thin materials including wood stains.

- Size Range: 0.5mm to 2.6mm

Tungsten Carbide – Tungsten carbide nozzles and needles are typically used for abrasive materials such as Glaze and Ceramics.

- Sizes: 1.4, 1.8, 2.2, 2.6mm


**Based on internal testing of existing Binks and competitor stainless steel. Tested over 1 million cycles.*



FULL SIZE GUN SPECIFICATION	
Max Air Pressure	140 psi / 9.6 bar
Max Fluid Pressure	140 psi / 9.6 bar (Standard spring)
Max Fluid Pressure	300 psi / 20.6 bar (Special spring)
Gun Body Anodized	Aluminium
Fluid Path	Stainless Steel
Fluid Inlet Size	3/8" NPS / BSP(m)
Air Inlet Size	1/4" NPS / BSP(m)
Gun Weight (pressure/suction)	440 grams
Gun Weight (gravity no cup)	417 grams
Wetted Parts	Stainless Steel & PTFE
Wetted Parts (gravity cup)	Acetal and Plated Brass
Wetted Parts (suction cup)	Aluminium and Plated Brass

ANATOMY OF A THOROUGHBRED

The Binks Trophy Series Spray Guns provide unequalled ergonomic durability for Industrial Finishing Applications everywhere.

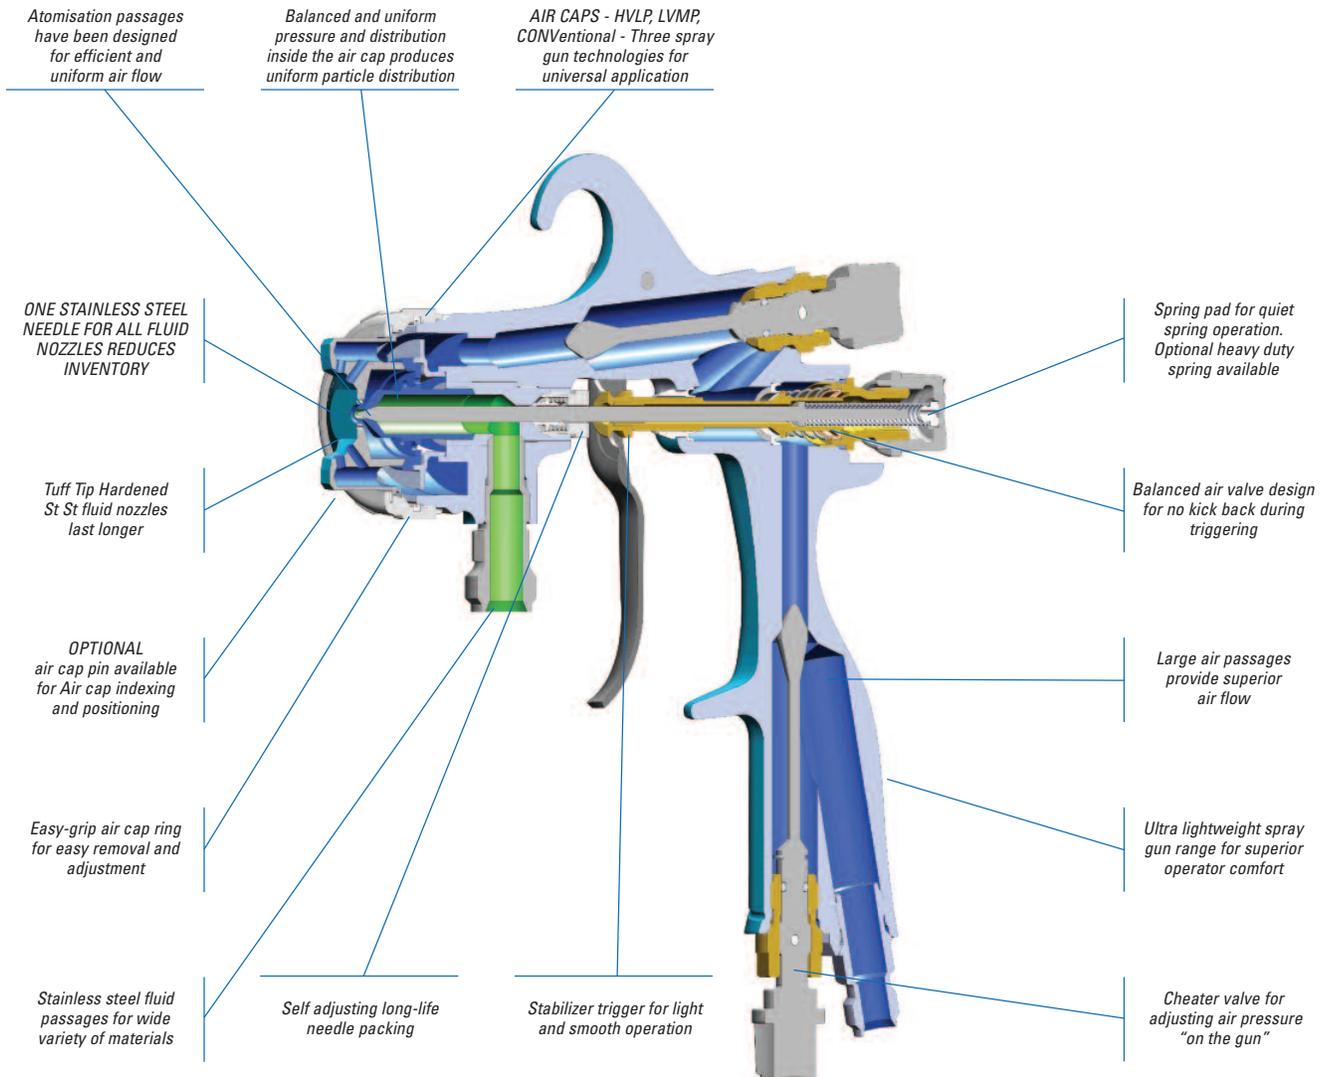

TROPHY TOUCH-UP GUNS

The Binks Trophy Series Touch-Up Spray Gun is the most versatile small gun on the market. The HVLP and LVMP air caps are optimised to spray at patterns up to 6 inches wide (150 mm). With gravity, suction and pressure versions, this gun will spray all of your small parts. In addition to being small and lightweight, the ergonomic design sets a new standard for touch-up guns. This gun shares many of its features with our full size Binks Trophy Series Spray Guns, giving it the durability that you expect from a Binks spray gun.

Typical Applications:


- Stain
- Epoxy
- Enamel
- Non-Stick Coatings
- Ceramic
- Low Viscosity Adhesives
- Plus more...



TOUCH-UP GUN SPECIFICATION

Max Air/Fluid Pressure	100 psi / 6.9 bar
Gun Body Anodized	Aluminium
Fluid Path	Stainless Steel
Fluid Inlet (Pressure gun)	3/8" NPS / BSP(m)
Air Inlet Size	1/4" NPS / BSP(m)
Gun Weight (pressure)	372 grams
Gun Weight (gravity no cup)	340 grams
Wetted Parts (gun)	Stainless Steel & PTFE
Wetted Parts (gravity cup)	Aluminium and Plated Brass
Wetted Parts (suction cup)	Polyethylene and Plated Brass

BINKS TROPHY SERIES

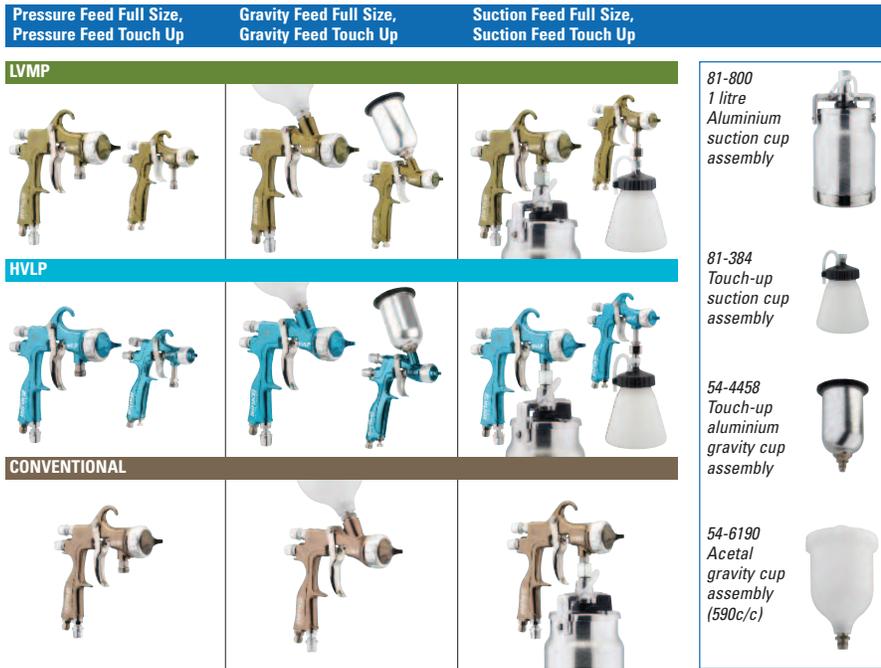

Trophy Full Size Gun

Trophy Air Cap Code	Spray Technology	SCFM	LPM	Fluid tip Size Range	Coating Types†
11-C	Conventional	14 @ 50 psi	277 @ 2 bar	1.0 mm - 1.8 mm	Thin / Medium / Heavy / Mould release / Non-stick coatings
12-C	Conventional (12 SCFM @ 50 PSI)	12 @ 50 psi	235 @ 2 bar	1.0 mm - 1.8 mm	Thin / Medium / Heavy / adhesives / Non-stick coatings
14-C	Conventional (24 SCFM @ 50 PSI)	24 @ 50 psi	481 @ 2 bar	1.4 mm - 2.6 mm	Medium / Ceramics / Zinc Rich Coatings
22-L	LVMP (Trans-Tech)	11 @ 30 psi	317 @ 2 bar	0.5 mm - 1.6 mm	Thin
23-L	LVMP (Trans-Tech)	11 @ 30 psi	300 @ 2 bar	1.0 mm - 1.8 mm	Thin / Medium
31-H	HVLP	10.5 @ 10 psi*	297 @ 0.68 bar*	0.85 mm - 1.8 mm	Thin / Medium
32-H	HVLP	15.5 @ 10 psi*	439 @ 0.68 bar*	1.2 mm - 1.8 mm	Thin / Medium
33-H	HVLP	11 @ 10 psi*	311 @ 0.68 bar*	0.85 mm - 1.6 mm	Thin / Medium

Carbide tips (option) 1.4, 1.8, 2.2, 2.6mm

Trophy Touch-up Gun

Trophy Air Cap Code	Spray Technology	SCFM	LPM	Fluid tip Size Range	Coating Types†
B1	LVMP (Trans-Tech)	7.8 @ 30 psi	220 @ 2 bar	0.8 mm - 1.2 mm	Thin
C1	HVLP	6.5 @ 20 psi	181 @ 1.4 bar	0.8 mm - 1.2 mm	Thin

Gun Inlet Pressure is measured at the gun inlet fitting with the gun triggered.

* Air consumption measured at the air cap.

† THIN 5-25 CENTIPOISE 10-13 sec. DIN 4 cup / MEDIUM 25-70 CENTIPOISE 14-22 sec. DIN 4 cup / HEAVY 70-160 CENTIPOISE 23-38 sec. DIN 4 cup

For further technical information refer to the Binks Trophy Series Spray Gun Service Bulletin.

Sales and Service through our Global Network of Industrial Distributors

Finishing Brands Locations

- Americas: **USA** ▪ **Mexico** ▪ **Brazil**
- Europe/Asia/Africa: **United Kingdom** ▪ **France** ▪ **Germany**
- Pacific Rim: **China** ▪ **Japan** ▪ **Australia**


TROPHY Spray Gun Set ups and Part Numbers.

FULL SIZE SPRAY GUNS	Part Number	Needle Material	Type
HVLP			
	2465-85HV-33SO-E	Stainless Steel	Pressure
	2465-10HV-33SO-E	Stainless Steel	Pressure
	2465-12HV-32SO-E	Stainless Steel	Pressure
	2465-14HV-32SO-E	Stainless Steel	Pressure
	2465-16HV-32SO-E	Stainless Steel	Pressure
	2465-18HV-32SO-E	Stainless Steel	Pressure
	2465-18HV-32SS-E	Stainless Steel	Suction
	2466-12HV-32SG-E	Stainless Steel	Gravity
	2466-14HV-32SG-E	Stainless Steel	Gravity
	2466-18HV-32SG-E	Stainless Steel	Gravity
LVMP (Trans-Tech)			
	2465-85LV-22SO-E	Stainless Steel	Pressure
	2465-10LV-22SO-E	Stainless Steel	Pressure
	2465-12LV-23SO-E	Stainless Steel	Pressure
	2465-14LV-23SO-E	Stainless Steel	Pressure
	2465-16LV-23SO-E	Stainless Steel	Pressure
	2465-18LV-23SS-E	Stainless Steel	Suction
	2466-12LV-23SG-E	Stainless Steel	Gravity
	2466-14LV-23SG-E	Stainless Steel	Gravity
	2466-18LV-23SG-E	Stainless Steel	Gravity
Conventional			
	2465-10CN-11SO-E	Stainless Steel	Pressure
	2465-12CN-11SO-E	Stainless Steel	Pressure
	2465-14CN-11SO-E	Stainless Steel	Pressure
	2465-16CN-11SO-E	Stainless Steel	Pressure
	2465-16CN-12SO-E	Stainless Steel	Pressure
	2465-18CN-11SO-E	Stainless Steel	Pressure
	2465-16CN-12SS-E	Stainless Steel	Suction
	2465-18CN-12SS-E	Stainless Steel	Suction
	2465-20CN-14SO-E	Stainless Steel	Pressure
	2465-22CN-14SO-E	Stainless Steel	Pressure
	2466-14CN-12SG-E	Stainless Steel	Gravity
	2466-16CN-12SG-E	Stainless Steel	Gravity
	2466-18CN-12SG-E	Stainless Steel	Gravity
Conventional Carbide			
	2465-14CN-14VO-E	Carbide	Pressure
	2465-18CN-14VO-E	Carbide	Pressure
	2465-22CN-14VO-E	Carbide	Pressure
	2465-26CN-14VO-E	Carbide	Pressure
Round Spray			
	2465-12CN-16SO-E	Stainless Steel	Pressure
TOUCH UP SPRAY GUNS			
HVLP			
	1465-08HV-C1S-E	Stainless Steel	Pressure
	1466-10HV-C1S-E	Stainless Steel	Gravity
LVMP (Trans-Tech)			
	1465-10LV-B1S-E	Stainless Steel	Pressure
	1465-12LV-B1S-E	Stainless Steel	Pressure
	1466-10LV-B1S-E	Stainless Steel	Gravity
	1466-12LV-B1S-E	Stainless Steel	Gravity

YELLOW INDICATES STANDARD SET-UP

Example of Trophy part numbering

2465-12LV-23SO-E

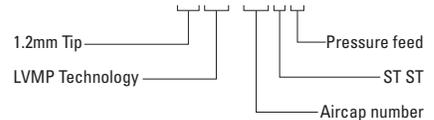

Double Diaphragm Pumps

1:1 Double Diaphragm Units

Double Diaphragm **Specifications**

Flow Rate Adjustable: 0-12 GPM (45 LPM)

Suction Lift.....20' (6.09m) Wet

Max. Particle Diameter.....1.6 mm (.0625")

Port Size:

Inlet & Outlet.....1/2" NPT

Air Inlet.....1/4" NPT

Air Exhaust.....1/4" NPT



The 1/2" 1:1 Double Diaphragm (DD) pump from C.A. Technologies is an all stainless steel pump. This unit can be used as a transfer pump or a supply pump. The CAT DD pump offers a low pulsation valve design and integrated pressure regulator panel. Low maintenance with only 3 moving parts, this is a great unit for many applications. These pumps can be outfitted specifically for your needs. They are available as bare pumps as well as 5 and 55 gallon outfit. These outfits include wall mount or cart mount, 5 gallon pail and 55 gallon drum packages. The 5 gallon pail and 55 gallon drum configurations are offered with or without air agitation.

Double Diaphragm Pump Configurations



70-254
DOUBLE DIAPHRAGM
PUMP
(BARE PUMP)



70-1101-5
DOUBLE DIAPHRAGM PUMP
WALL MOUNT
(5 GALLON SIPHON)

70-1101-55
DOUBLE DIAPHRAGM PUMP
WALL MOUNT
(55 GALLON SIPHON)



70-1102-5
DOUBLE DIAPHRAGM PUMP
CART MOUNT
(5 GALLON SIPHON)

70-1102-55
DOUBLE DIAPHRAGM PUMP
CART MOUNT
(55 GALLON SIPHON)



70-1103
DOUBLE DIAPHRAGM PUMP
PAIL MOUNT
(5 GALLON)

70-1104
DOUBLE DIAPHRAGM PUMP
PAIL MOUNT WITH AGITATOR
(5 GALLON)



70-1105
DOUBLE DIAPHRAGM PUMP
DRUM MOUNT
(55 GALLON)

70-1106
DOUBLE DIAPHRAGM PUMP
DRUM MOUNT WITH AGITATOR
(55 GALLON)

Double Diaphragm Pump Accessories



Color Change Manifold
70-260 (3/8" Brass)
70-260SS (3/8" Stainless)
70-266SS (1/2" Stainless)



74-520 1/2" 5 Gal Siphon Hose Assy
74-524 1/2" 55 Gal Siphon Hose Assy
74-530 3/4" 5 Gal Siphon Hose Assy
74-531 3/4" 55 Gal Siphon Hose Assy
74-538 3/8" 5 Gal Siphon Hose Assy



Fluid Regulator
52-203



Pulse Chamber
70-271

The preferred and most trusted resource for finishing equipment and services.

Reliability and customer satisfaction is our goal... We'll be there when you need us.

- Home
- Products
- Specialty Literature & Videos
- About Us
- Contact
- Cliff Notes
- Outfits PIN & Price Calculator

Double Diaphragm Pumps

Double Diaphragm Pumps



The 1/2" 1:1 Double Diaphragm (DD) pump from C.A. Technologies is an all stainless steel pump. This unit can be used as a transfer pump or a supply pump. The CAT DD pump offers a low pulsation valve design and integrated pressure regulator panel. Low maintenance with only 3 moving parts, this is a great unit for many applications.

C.A. Technologies DD pumps can be outfitted specifically for your needs. They are available as bare pumps as well as 5 and 55 gallon outfits. These outfits include wall mount or cart mount, 5 gallon pail and 55 gallon drum packages. The 5 gallon pail and 55 gallon drum configurations are offered with or without air agitation.

Specifications:
 Inlet & Outlet - 1/2" NPT
 Air Inlet - 1/4" NPT
 Air Exhaust - 1/4" NPT

[Part Sheet: Double Diaphragm Pump](#)
[Sales Sheet: Double Diaphragm Pumps](#)

<i>Double Diaphragm Pumps</i>		
Part #	Description	Agitator
70-254	Bare Pump	None
70-1101	Wall Mount Without Siphon Tube	None
70-1101-5	Wall Mount With Siphon Tube (5 Gallon)	None
70-1101-55	Wall Mount With Siphon Tube (55 Gallon)	None
70-1102	Cart Mount Without Siphon Tube	None
70-1102-5	Cart Mount With Siphon Tube (5 Gallon)	None
70-1102-55	Cart Mount With Siphon Tube (55 Gallon)	None
70-1103	5 Gallon Pail Mount	None
70-1104	5 Gallon Pail Mount	Air
70-1105	55 Gallon Drum Cover Mount	None
70-1106	55 Gallon Drum Cover Mount	Air
70-1107	55 Gallon Bung Mount	None

Accessories

 COLOR CHANGE MANIFOLD 70-266SS (1/2" Stainless)	 FLUID REGULATOR 52-203
 PULSE CHAMBER 70-271	 SIPHON HOSE ASSY 74-538 - 3/8" x 3' 74-520 - 1/2" x 3' 74-524 - 1/2" x 5'



Company Information

About C.A. Technologies
 Members of WAGNER Group
 Contact C.A. Technologies

A Member of WAGNER Group



Coating Atomization Technologies
 337 S. Arthur Avenue, Louisville CO 80027
 Phone: (888) 820-4498
 Fax: (303) 438-5708