


# Product Catalog



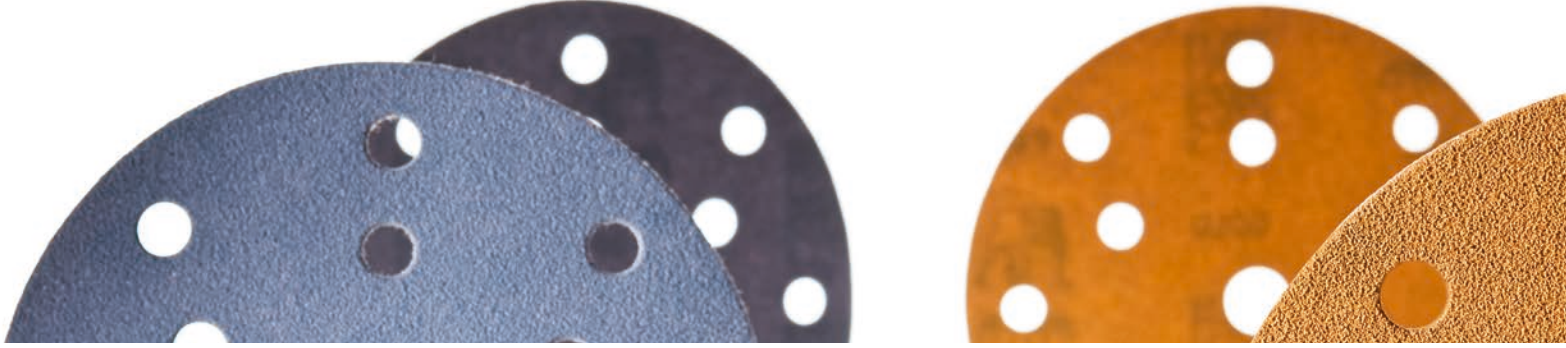

# CONTENTS

- Abranet® .....6
- Abranet® Ace .....7
- Abranet® Ace HD .....7
- Abranet® SiC NS .....8
- Autonet® .....8
- OSP .....9
- Abralon® ..... 10
- Polarstar® .....11
- Polarstar® SR .....11
- Microstar® .....12
- Q.Silver® .....13
- Q.Silver® ACE .....13
- Q.Silver® Micro .....14
- Gold Proflex .....14
- Goldflex-Soft .....14
- Gold .....15
- Gold Soft .....16
- Coarse Cut .....16
- Basecut® .....17
- Caratflex .....17
- Waterproof .....18
- Hiolit XO .....18
- Sponges .....18
- Mirlon Total® .....19
- Mirlon .....19
- Hiolit JF Belts .....20
- Hiolit XO Belts .....20
- Jepuflex Plus Belts .....21
- Sica Belts .....21
- Abranet® Max Belts .....21
- Grinding Discs .....22
- Polarshine® .....23
- Polishing Pads .....24
- Smart Carts/Trolley .....27
- Dust Extractor .....28
- Dust Extractor Hoses .....29
- 1.25" Tools .....30
- 3" Tools .....31
- 5" Tools .....34
- 6" Tools .....37
- 8" Tools .....40
- Hand Blocks .....40
- 1.25" Backup Pads .....41
- 3" Backup Pads .....41
- 5" Backup Pads .....42
- 6" Backup Pads .....44
- 8" Backup Pads .....45
- Interface/Protector Pads .....46

## NET Abrasives

Mirka's innovative NET sanding concept is unlike any other. The patented construction consists of a dense network of fabric threads onto which the abrasive grit is bonded. This open weave, net structure means no dust particle is more than 0.5mm from a dust extraction hole.

## Film-Backed Abrasives

Mirka's film backing material creates a flexible and smooth abrasive surface, compared to paper backing. It offers outstanding performance on hard tooling gelcoats and scratch resistant clearcoats.

## Foam Abrasives

Abralon's flexible construction creates a smooth sanding pattern on contoured surfaces and edges while minimizing the risk of pressure marks. The flexible weave also allows water and air to pass freely, making it suitable for both dry and wet sanding.

## Paper-Backed Abrasives

Mirka's paper-backed abrasives are durable and well suited for high speed sanding in a multitude of applications. All products utilize stearate coatings to prevent clogging which allows for the optimal sanding result.

## Cloth-Backed Abrasives

Mirka's cloth-backed abrasives are intended for machine sanding where durability and excellent edge wear resistance is needed. Primarily used when large amounts of material need to be removed.

## Non-Woven

Mirka's non-woven abrasives are a three-dimensional fiber sanding material, designed to be extremely flexible and long lasting. They can be used wet or dry, and perform very well when profile sanding.

## Belts


Mirka's abrasive belts are designed with durability and performance in mind; providing a smooth surface with minimal variation of the surface finish. The technology incorporated into the belts reduces excessive surface dust and minimizes raised fibers with the highest level of efficiency.

## Polishing Compounds & Pads

Polarshine® polishing compounds tackle any finishing job, small or large. Pair Polashine with Mirka's line up of polishing pads to achieve the desired finish.

## Dust-Free Sanding Accessories

Dust extractors, hoses and related accessories that help make up dust-free systems. Carts and trolleys make these systems mobile will keeping all abrasive components organized.

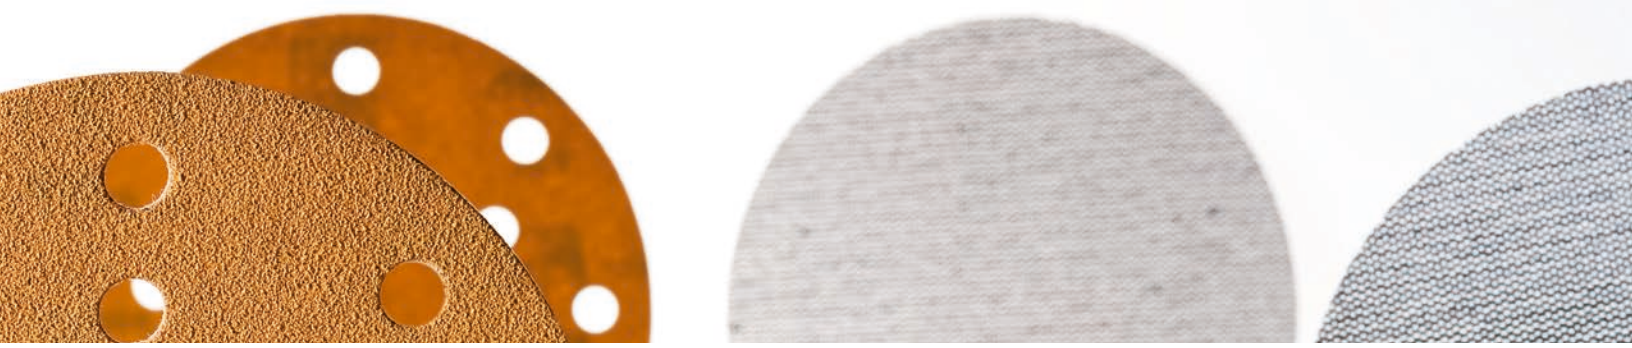


# ABOUT MIRKA

Over the past thirty years, Mirka has grown into one of the world's largest producers of coated abrasives.

Today we have a wide product range for individual operations and complete sanding systems for specialized applications. Our product range includes not only abrasives, but tools and accessories, as well as polishing components.

Our company philosophy can be described as striving for continuous improvements, systematic investments in quality, cost awareness, careful planning, the ability to take action and openness to unique solutions.

## Symbols

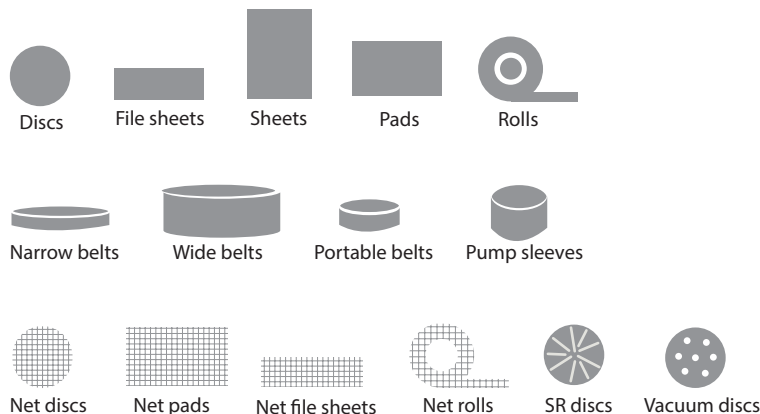

## Product Number Reference Guide

**Product numbers are by series, configuration and grit. The Last digits of the product number are the GRIT (XXX).**

- EX.** 9A-203-XXX = 9A-203-800 represents Abranet®, 3" disc, P800  
23-647-XXX = 23-647-320 represents Gold, 5" vacuum disc, P320  
FM-611-XXX = FM-611-2500 represents Microstar®, 6" vacuum disc, P2500

**For part numbers without dashes - the last two digits XX are GRITS (ex. Polarstar, FA622050XX)**

- 08 = P80, 10 = P100, 12 = P120, 15 = P150, 18 = P180, 25 = P240, 32 = P320, 41 = P400, 51 = P500, 61 = P600,  
81 = P800, 92 = P1000, 93 = P1200, 94 = P1500



Visit [www.mirka.com](http://www.mirka.com) for general information on Mirka's products and systems

**MIRKA WARRANTY POLICY**  
(EFFECTIVE: January 1, 2017)

**Warranty**

Mirka USA Inc. (“Mirka”) warrants that the following Mirka products will be free from defects in material or workmanship under normal operating conditions from the date of purchase for the time period indicated:

- a. Pneumatic and electric tools (except dust extractors): 2 years \*
- b. All other tools and products: 1 year

\* By registering a pneumatic or electric tool within 30 days of purchase at [www.mirka.com/warranty-registration](http://www.mirka.com/warranty-registration), Mirka will warrant the product for an additional one year.

**Terms and Conditions**

The purchase of any Mirka product will constitute and be deemed to be acceptance of and agreement to the Mirka Warranty Policy (“Policy”) by the purchaser and/or user (collectively “User”) of any Mirka product.

The Policy shall not apply to:

- Normal wear and tear; or
- Product failure or damages caused by:
  - Subsequent modification of the Mirka product;
  - Repairs attempted or made on the Mirka product other than by Mirka;
  - Misuse, abuse or neglect;
  - Careless or unsafe handling;
  - Inadequate or improper maintenance;
  - Failure to follow any applicable instructions for the Mirka product; or
  - Anything other than defects in material or workmanship.

Mirka’s sole obligation under this Policy shall be, at Mirka’s option, to: (1) repair or replace any Mirka product that is defective in material or workmanship; or (2) refund the purchase price of the Mirka product that is defective in material or workmanship. Repairs during the warranty period do not lengthen or renew the original warranty period of the product.

The User is responsible for determining whether the Mirka product is fit for a particular purpose and suitable for the User’s application. The User is also responsible for complying with all applicable operating instructions and any applicable safety and health-related regulations and for taking any safety and health-related precautions when using Mirka products. This includes, but is not limited to: wearing safety glasses, facemasks, gloves, and protective clothing, if necessary; following instructions and warning labels; and operating Mirka products safely including at safe operating speeds. By User’s purchase or use of Mirka products, User acknowledges, represents, and warrants that User will: (a) comply with the foregoing; and (b) assume all risks in connection with the use of Mirka products.

No agent, representative, employee, distributor or dealer of Mirka is authorized to modify this Policy or to issue any warranty regarding any Mirka products.

Any civil action against Mirka relating to or arising out of the sale of Mirka products shall be commenced within one (1) year of the date the cause of action accrued or otherwise the cause of action shall be barred.

**Disclaimer**

EXCEPT FOR THE PROVISIONS OF THIS “WARRANTY,” MIRKA EXPRESSLY DISCLAIMS ALL GUARANTEES AND/OR WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.

**Limitation on Liability**

MIRKA’S LIABILITY FOR ANY LOSS OR DAMAGE ARISING OUT OF OR RESULTING FROM ANY BREACH OR DEFAULT BY MIRKA IN CONNECTION WITH THE SALE OF MIRKA PRODUCTS HEREUNDER SHALL NOT EXCEED THE PURCHASE PRICE THEREOF, REGARDLESS OF WHETHER SUCH LIABILITY ARISES IN CONTRACT, TORT (INCLUDING, WITHOUT LIMITATION, STRICT LIABILITY) OR OTHERWISE.

IN NO EVENT SHALL MIRKA BE LIABLE FOR LOSS OR DAMAGE ARISING FROM THE MIRKA PRODUCT, WHETHER DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OF ANY KIND REGARDLESS OF THE LEGAL THEORY ASSERTED, INCLUDING, WITHOUT LIMITATION, WARRANTY, CONTRACT, NEGLIGENCE OR STRICT LIABILITY.

**Submitting a Warranty Claim**

To submit a warranty repair claim, Users must contact their Mirka dealer or Mirka customer support.

Tools returned for warranty repair must be accompanied by a valid purchase receipt or invoice.

# Industries / Applications



Auto

Visit [www.mirkacollision.us](http://www.mirkacollision.us) for information on Mirka's automotive products and applications



Marine/  
Composite

Visit [www.mirkamarine.us](http://www.mirkamarine.us) for information on Mirka's marine / composite products and applications



Wood

Visit [www.mirkawoodworking.us](http://www.mirkawoodworking.us) for information on Mirka's woodworking products and applications



Dust-Free

Visit [www.dustfreeperfection.us](http://www.dustfreeperfection.us) for information on Mirka's dust-free sanding products and systems



Glass

Visit [www.mirka.com/glass\\_sanding](http://www.mirka.com/glass_sanding) for information on Mirka's glass sanding products



Industrial

## SAFETY WARNINGS



These symbols are found on all Mirka SOPs, as well as the product packaging for Mirka abrasives. Specific requirements for personal protective equipment (PPE) are presented in many different OSHA standards, published in 29 CFR.



Wear appropriate eye and face protection and ensure that the selected form of protection is appropriate to the work being performed and properly fits each worker exposed to the hazard.



Use gloves specifically designed for the hazards and tasks found in the workplace. The nature of the hazard and the operation involved will affect the selection of gloves.



If engineering and work practice controls do not lower employee exposure to workplace noise to acceptable levels, employees must wear appropriate hearing protection.



Selecting the right respirator requires an assessment of all the workplace operations, processes or environments that may create a respiratory hazard.



Read and follow all instructions contained in Technical Data Sheets and User Manuals.

***The User is responsible for determining whether the Mirka product is fit for a particular purpose and suitable for the User's application. The User is also responsible for complying with any applicable safety and health-related regulations and taking any safety and health-related precautions when using Mirka products. This includes, but is not limited to: wearing safety glasses, facemasks, gloves, and protective clothing, if necessary; following instructions and warning labels; and operating Mirka products safely including at safe operating speeds. By User's purchase or use of Mirka products, User acknowledges, represents, and warrants that User will: (a) comply with the foregoing; (b) assume all risks in connection with the use of Mirka products; and (c) read and understand the Mirka Warranty Policy.***





# ABRANET® ACE - AC Series

- Developed to achieve outstanding results on challenging surface conditioning and repair applications
- Well designed for metal applications
- Ceramic/ceramic coated grain
- Removal of dust particles eliminates loading and pilling problems
- Improved woven mesh backing offers increased strength and edge wear
- Net abrasives are a key component for dust-free sanding



## TECHNICAL SPECIFICATIONS

|                   |                        |
|-------------------|------------------------|
| <b>Grain</b>      | Ceramic/Ceramic coated |
| <b>Bonding</b>    | Resin over resin       |
| <b>Backing</b>    | Polypropylene (PP)     |
| <b>Coating</b>    | Closed                 |
| <b>Color</b>      | Maroon                 |
| <b>Attachment</b> | Grip                   |



| Available Sizes                   |  | Available Grits |
|-----------------------------------|--|-----------------|
| <b>3" Grip</b><br>AC-203-XXX      |  | P80-P1000       |
| <b>5" Grip</b><br>AC-232-XXX      |  | P80-P1000       |
| <b>6" Grip</b><br>AC-241-XXX      |  | P80-P1000       |
| <b>3" x 5" Grip</b><br>AC-178-XXX |  | P80-P400        |

# ABRANET® ACE HEAVY DUTY - AH Series

- Ceramic grains allows for maximum cutting speed and consistent performance across a variety of surfaces and substrates
- Coarse grit range makes this ideal for aggressive stock removal
- Features exceptional resistance to edge wear and clogging
- Net abrasives are a key component for dust-free sanding



## TECHNICAL SPECIFICATIONS

|                   |                  |
|-------------------|------------------|
| <b>Grain</b>      | Ceramic          |
| <b>Bonding</b>    | Resin over resin |
| <b>Backing</b>    | Net              |
| <b>Coating</b>    | Closed           |
| <b>Color</b>      | Brown            |
| <b>Attachment</b> | Grip             |



| Available Sizes                        |  | Available Grits |
|--|--|-----------------|
| <b>5" Grip</b><br>AH-232-XXX           |  | P40, P60, P80   |
| <b>6" Grip</b><br>AH-241-XXX           |  | P40, P60, P80   |
| <b>8" Grip</b><br>AH-252-XXX           |  | P40, P60, P80   |
| <b>2-3/4" x 33' Grip</b><br>AH-570-XXX |  | P40, P60, P80   |

# ABRANET® SiC NS - 9B Series

- Multifunctional net abrasive without stearate
- Suitable for finishing glass, plastics, rubber and composites
- Eliminates clogging and pilling
- Offers high performance and long life
- Net abrasives are a key component for dust-free sanding



## TECHNICAL SPECIFICATIONS

|                   |                  |
|-------------------|------------------|
| <b>Grain</b>      | Silicon Carbide  |
| <b>Bonding</b>    | Resin            |
| <b>Backing</b>    | Polyamide fabric |
| <b>Coating</b>    | Closed           |
| <b>Color</b>      | Gray             |
| <b>Attachment</b> | Grip             |



| Available Sizes              |  | Available Grits   |
|------------------------------|--|---|
| <b>3" Grip</b><br>9B-203-XXX |  | P80, P120, P150, P180, P240, P320, P400<br>*3" Custom-order only.<br>Minimum 2-week lead time |
| <b>5" Grip</b><br>9B-232-XXX |  | P80, P120, P150, P180, P240, P320, P400   |

# AUTONET® - AE Series

- Excellent initial aggressivity
- Long life-span compared to paper-backed discs
- Eliminates clogging and pilling
- Developed specifically for the automotive repair industry
- Rolls have perforations every 2-3/4" making it simple to get the desired length.
- Net abrasives are a key component for dust-free sanding



## TECHNICAL SPECIFICATIONS

|                   |                  |
|-------------------|------------------|
| <b>Grain</b>      | Aluminum oxide   |
| <b>Bonding</b>    | Resin over resin |
| <b>Backing</b>    | Polyamide fabric |
| <b>Coating</b>    | Closed           |
| <b>Color</b>      | Gray             |
| <b>Attachment</b> | Grip             |



| Available Sizes                        |  | Available Grits                     |
|--|--|-------------------------------------|
| <b>3" Grip</b><br>AE-203-XXX           |  | P80-P800                            |
| <b>5" Grip</b><br>AE232050XX           |  | P80-P800                            |
| <b>6" Grip</b><br>AE241050XX           |  | P80-P800                            |
| <b>3" x 4" Grip</b><br>AE-129-XXX      |  | P120, P180                          |
| <b>2-3/4" x 33' Grip</b><br>AE-570-XXX |  | P80-P600<br>Perforated every 2-3/4" |





# ABRALON® - 8A Series

- Combines benefits of abrasive cloth and non-woven products
- Constructed of fabric face, foam center and a grip backing
- Abrasive grains are bonded evenly to the fabric face
- Can be used for dry or wet sanding
- Open cell design holds large amounts of water or solvent for lubrication and cooling



## TECHNICAL SPECIFICATIONS

|                   |                         |
|-------------------|-------------------------|
| <b>Grain</b>      | Silicon carbide         |
| <b>Bonding</b>    | Special resin           |
| <b>Backing</b>    | Knitted fabric on foam  |
| <b>Coating</b>    | Special Abralon® method |
| <b>Color</b>      | Gray                    |
| <b>Attachment</b> | Grip                    |




### Common applications for Abralon®

- Pre-polishing clearcoats (1000-4000)
- Surface finishing of aluminum or stainless steel
- Finishing of solid surface counter tops
- Sanding of sealers and primers (180-500)
- Removing mold marks and flash from plastic parts
- Surface finishing of glass surfaces

| Available Sizes                       | Available Grits                       |
|---------------------------------------|---------------------------------------|
| <b>1-1/4" Grip</b><br>8A-600-XXX      | 360, 500, 1000, 2000, 4000            |
| <b>3" Grip</b><br>8A-203-XXX          | 180, 360, 500, 1000, 2000, 3000, 4000 |
| <b>5" Grip</b><br>8A-232-XXX          | 180, 360, 500, 600                    |
| <b>6" Grip</b><br>8A-241-XXX          | 180, 360, 500, 1000, 2000, 3000, 4000 |
| <b>9" Grip</b><br>8A-616-XXX          | 360, 500, 1000, 2000                  |
| <b>12" Grip</b><br>8A-618-XXX         | 180, 360, 500, 1000, 2000             |
| <b>3" x 4" *</b><br>XS-8A-129-XXX     | 180, 360, 500, 1000                   |
| <b>3.2" x 5.2" *</b><br>XS-8A-178-XXX | 180, 360, 500, 1000, 2000, 3000, 4000 |
| <b>3.67" x 9" *</b><br>XS-8A-121-XXX  | 180, 360, 500, 1000                   |

\* 3" x 4" / 3.2" x 5.2" / 3.67" x 9"  
Custom order only.  
Minimum 2 week lead time.

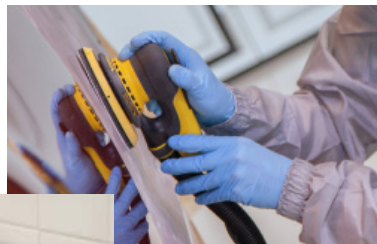

# MICROSTAR® - FM Series

- Ideal for removal of runs, dust nibs and excess orange peel from topcoat finishes before repainting or buffing
- Resists loading for longer disc life
- Ideal for sanding fresh or soft clearcoat
- Leaves an even scratch pattern, which buffs out quickly on all types of automotive paints
- Film-backed discs have full resin bonded aluminum oxide grain



## TECHNICAL SPECIFICATIONS

|                   |                      |
|-------------------|----------------------|
| <b>Grain</b>      | Aluminum oxide       |
| <b>Bonding</b>    | Low VOC resin system |
| <b>Backing</b>    | Polyester film       |
| <b>Coating</b>    | Semi-open            |
| <b>Color</b>      | White                |
| <b>Attachment</b> | Grip                 |



| Available Sizes                             |  | Available Grits |
|---|--|-----------------|
| <b>3" Grip</b><br><i>FM-608-XXX</i>         |  | P800-P2500      |
| <b>3" 6-Hole Grip</b><br><i>FM-634-XXX</i>  |  | P800-P2500      |
| <b>5" Grip</b><br><i>FM-612-XXX</i>         |  | P800-P2500      |
| <b>6" Grip</b><br><i>FM-622-XXX</i>         |  | P800-P2500      |
| <b>6" 15-Hole Grip</b><br><i>FM-611-XXX</i> |  | P800-P2500      |

# POLARSTAR® - FA Series

- Outstanding performance on demanding applications such as hard tooling gelcoats and the latest scratch resistant automotive clearcoats
- Unique abrasive material resists clogging and delivers long lasting performance
- Excellent durability – retains its high performance sanding properties



## TECHNICAL SPECIFICATIONS

|                   |   |
|-------------------|---|
| <b>Grain</b>      | Aluminum oxide P600<br>Silicon carbide P800–P1500 |
| <b>Bonding</b>    | Resin over resin                                  |
| <b>Backing</b>    | Polyester film                                    |
| <b>Coating</b>    | Semi-open   |
| <b>Color</b>      | Green / white                                     |
| <b>Attachment</b> | Grip  |



| Available Sizes                             |  | Available Grits |
|---|--|-----------------|
| <b>3" Grip</b><br><i>FA-608-XXX</i>         |  | P600-P1500      |
| <b>5" Grip</b><br><i>FA6125061XX</i>        |  | P600-P1500      |
| <b>6" Grip</b><br><i>FA622050XX</i>         |  | P600-P1500      |
| <b>6" 15-Hole Grip</b><br><i>FA611050XX</i> |  | P600-P1500      |



# Q.SILVER® - 2B Series

- Excellent, uniform grain distribution provides an enhanced surface with a more consistent scratch pattern
- Semi-open coat design provides fast finishing
- Resin bonding provides superior grain support
- Q.Silver® has a special self-sacrificing stearate coating to reduce clogging and loading



## TECHNICAL SPECIFICATIONS

|                   |                                       |
|-------------------|---------------------------------------|
| <b>Grain</b>      | Aluminum oxide                        |
| <b>Bonding</b>    | Resin over resin                      |
| <b>Backing</b>    | P80-P150 D-paper<br>P180-P500 C-paper |
| <b>Coating</b>    | Semi-open                             |
| <b>Color</b>      | Blue                                  |
| <b>Attachment</b> | Grip and PSA                          |



| Available Sizes                            |  | Available Grits             |
|--|--|-----------------------------|
| <b>3" Grip</b><br>2B-608-XXX               |  | P80-P400                    |
| <b>3" 6-Hole Grip</b><br>2B-634-XXX        |  | P80, P180, P320             |
| <b>5" Grip</b><br>2B-612-XXX               |  | P80-P500                    |
| <b>5" PSA</b><br>2B-332-XXX                |  | P80-P500                    |
| <b>5" 5-Hole Grip</b><br>2B-614-XXX        |  | P80-P500                    |
| <b>5" 17-Hole Grip</b><br>2B-647-XXX       |  | P80-P500                    |
| <b>6" PSA Linkrol</b><br>2B-342-XXX        |  | P80-P500                    |
| <b>6" Grip</b><br>2B-622-XXX               |  | P80-P500                    |
| <b>6" 15-Hole Grip</b><br>2B-611-XXX       |  | P80-P500                    |
| <b>2-3/4" x 16-1/2" Grip</b><br>2B-663-XXX |  | P80, P120, P180, P220, P320 |
| <b>2-3/4" x 60' PSA</b><br>2B-574-XXX      |  | P80                         |
| <b>2-3/4" x 120' PSA</b><br>2B-584-XXX     |  | P120-P400                   |


# Q.SILVER® Ace - 2C Series

- Developed to achieve outstanding results on challenging surface conditioning and repair applications
- Well suited for metal applications
- Ceramic/ceramic coated grain
- Self-sacrificing stearate coating to reduce clogging and loading
- Semi-open coat design provides fast finishing



## TECHNICAL SPECIFICATIONS

|                   |  |
|-------------------|--|
| <b>Grain</b>      | Ceramic P80-P240<br>Ceramic coated P320-P500 |
| <b>Bonding</b>    | Resin over resin                             |
| <b>Backing</b>    | B-paper                                      |
| <b>Coating</b>    | Semi-open                                    |
| <b>Color</b>      | Blue   |
| <b>Attachment</b> | Grip and PSA                                 |



| Available Sizes                            |  | Available Grits                   |
|--|--|-----------------------------------|
| <b>1-1/4" Grip</b><br>XS-2C-600-XXX        |  | P80-P500                          |
| <b>3" 6-Hole Grip</b><br>2C-634-XXX        |  | P80-P500                          |
| <b>5" Grip</b><br>2C-612-XXX               |  | P80-P500                          |
| <b>5" 17-Hole Grip</b><br>2C-647-XXX       |  | P80-P500                          |
| <b>5" PSA</b><br>2C-332-XXX                |  | P80-P220                          |
| <b>6" Grip</b><br>2C-622-XXX               |  | P80, P120, P180, P320, P400, P500 |
| <b>6" 15-Hole Grip</b><br>2C-611-XXX       |  | P80-P500                          |
| <b>2-3/4" x 5" Grip</b><br>2C-674-XXX      |  | P80, P180, P320                   |
| <b>2-3/4" x 7-3/4" Grip</b><br>2C-635-XXX  |  | P80, P180, P320                   |
| <b>2-3/4" x 16-1/2" Grip</b><br>2C-664-XXX |  | P80, P120, P180, P220, P320       |



# Q.SILVER® Micro - 2C Series

- Excellent, uniform grain distribution provides an enhanced surface with a more consistent scratch pattern
- Outstanding performance on demanding applications such as hard tooling gelcoats and the latest scratch resistant automotive clearcoats
- Ideal for removal of runs, dust nibs and excess orange peel from topcoat finishes before repainting or buffing
- Semi-open coat design provides fast finishing
- Q.Silver® has a special self-sacrificing stearate coating to reduce clogging and loading

## TECHNICAL SPECIFICATIONS

|                   |                  |
|-------------------|------------------|
| <b>Grain</b>      | Silicon Carbide  |
| <b>Bonding</b>    | Resin over resin |
| <b>Backing</b>    | B-paper          |
| <b>Coating</b>    | Semi-open        |
| <b>Color</b>      | Blue             |
| <b>Attachment</b> | Grip and PSA     |



| Available Sizes                      |  | Available Grits |
|--------------------------------------|--|-----------------|
| <b>3" Grip</b><br>2C-608-XXX         |  | 600-1500        |
| <b>5" Grip</b><br>2C-612-XXX         |  | 600-1500        |
| <b>5" PSA</b><br>2C-332-XXX          |  | 600             |
| <b>5" 5-Hole Grip</b><br>2C-614-XXX  |  | 600-1000        |
| <b>5" 17-Hole Grip</b><br>2C-647-XXX |  | 800             |
| <b>6" Grip</b><br>2C-622-XXX         |  | 600-1500        |
| <b>6" PSA</b><br>2C-341-XXX          |  | 600, 800        |
| <b>6" 15-Hole Grip</b><br>2C-611-XXX |  | 600-1500        |

# GOLD PROFLEX - 23 Series

- Designed for hand sanding applications
- Aluminum oxide grain provides a good cut and an excellent scratch pattern
- Flexible, latex-impregnated backing provides superior conformity in profile sanding
- Anti-slip coating on the back side provides a solid grip and feel during sanding

## TECHNICAL SPECIFICATIONS

|                   |                                     |
|-------------------|-------------------------------------|
| <b>Grain</b>      | Aluminum oxide                      |
| <b>Bonding</b>    | Resin over resin                    |
| <b>Backing</b>    | P80-P180 C-paper, P220-P800 B-paper |
| <b>Coating</b>    | Semi-open                           |
| <b>Color</b>      | Gold                                |
| <b>Attachment</b> | Plain                               |



| Available Sizes                           |  | Available Grits |
|---|--|-----------------|
| <b>9" x 11" Plain</b><br>23-104-XXX       |  | P80-P800        |
| <b>4.5" x 5.5" Plain</b><br>XS-23-114-XXX |  | P80-P400        |
| <b>3.67" x 9" Plain</b><br>XS-23-121-XXX  |  | P80-P500        |

# GOLDFLEX-SOFT - 23 Series

- Designed for hand sanding applications
- A-weight, latex impregnated paper backing with PE foam is highly flexible and ideal for profile sanding
- Produces a high quality finish
- Durable, aluminum oxide grain delivers a long lasting, smooth cut
- Bulk roll is perforated to allow easy sheet dispensing from box

## TECHNICAL SPECIFICATIONS

|                   |                               |
|-------------------|-------------------------------|
| <b>Grain</b>      | Aluminum oxide                |
| <b>Bonding</b>    | Resin over resin              |
| <b>Backing</b>    | A-weight latex paper, PE-foam |
| <b>Coating</b>    | Semi-open                     |
| <b>Color</b>      | Gold                          |
| <b>Attachment</b> | Plain                         |

| Available Sizes                        |  | Available Grits |
|--|--|-----------------|
| <b>4-1/2" x 5" Plain</b><br>23-145-XXX |  | P150-P1000      |



# BULLDOG GOLD - 23 Series

- Designed for both finishing and heavy stock removal
- Aluminum oxide grain delivers a fast, and long lasting cut
- High strength resin bonding provides superior grain support
- Special stearate coating is used to maximize resistance to clogging and loading
- Semi-open coat produces an even, consistent scratch pattern



## TECHNICAL SPECIFICATIONS

|                   |  |
|-------------------|--|
| <b>Grain</b>      | Aluminum oxide   |
| <b>Bonding</b>    | Resin over resin, Progressive Bond®                              |
| <b>Backing</b>    | P80-P150 D-weight latex paper,<br>P180-P800 C-weight latex paper |
| <b>Coating</b>    | Semi-open  |
| <b>Color</b>      | Gold   |
| <b>Attachment</b> | Grip and PSA   |



| Available Sizes                            |  | Available Grits |
|--|--|-----------------|
| <b>1-1/4" Grip</b><br>XS-23-600-XXX        |  | P80-P500        |
| <b>3" Grip</b><br>23-608-XXX               |  | P80-P800        |
| <b>3" 6-Hole Grip</b><br>23-634-XXX        |  | P80-P800        |
| <b>3-1/2" PSA</b><br>23-308-XXX            |  | P80-P400        |
| <b>5" Grip</b><br>23-612-XXX               |  | P36-P800        |
| <b>5" PSA</b><br>23-332-XXX                |  | P36-P800        |
| <b>5" PSA Linkrol</b><br>23-314-XXX        |  | P80-P800        |
| <b>5" PSA Autobox</b><br>23-388-XXX        |  | P80-P500        |
| <b>5" 5-Hole Grip</b><br>23-614-XXX        |  | P60-P800        |
| <b>5" 5-Hole PSA</b><br>23-321-XXX         |  | P60-P400        |
| <b>5" 5-Hole PSA Linkrol</b><br>23-315-XXX |  | P80-P240        |
| <b>5" 8-Hole Grip</b><br>23-615-XXX        |  | P80-P400        |
| <b>5" 8-Hole PSA</b><br>23-320-XXX         |  | P80-P400        |
| <b>5" 17-Hole Grip</b><br>23-647-XXX       |  | P60-P800        |

| Available Sizes                             |  | Available Grits             |
|---|--|-----------------------------|
| <b>6" Grip</b><br>23-622-XXX                |  | P36-P800                    |
| <b>6" PSA</b><br>23-341-XXX                 |  | P36-P800                    |
| <b>6" PSA Linkrol</b><br>23-342-XXX         |  | P80-P500                    |
| <b>6" PSA Autobox</b><br>23-379-XXX         |  | P80-P500                    |
| <b>6" 6-Hole Grip</b><br>23-624-XXX         |  | P60-P800                    |
| <b>6" 6-Hole PSA Linkrol</b><br>23-343-XXX  |  | P80-P400                    |
| <b>6" 15-Hole Grip</b><br>23-611-XXX        |  | P60-P800                    |
| <b>8" Grip</b><br>23-631-XXX                |  | P36, P80, P150,<br>P180     |
| <b>8" PSA</b><br>23-352-XXX                 |  | P36, P40,<br>P80-P400       |
| <b>8" 8-Hole Grip</b><br>23-632-XXX         |  | P180, P320                  |
| <b>2-3/4" x 16-1/2" PSA</b><br>23-364-XXX   |  | P36, P40, P60,<br>P80, P120 |
| <b>2-3/4" x 16-1/2" Grip</b><br>23-663-XXX  |  | P36, P40, P80,              |
| <b>2-3/4" x 17-1/2" Plain</b><br>23-170-XXX |  | P36-P240                    |
| <b>2-3/4" x 60' PSA</b><br>23-574-XXX       |  | P80, P100                   |
| <b>2-3/4" x 120' PSA</b><br>23-584-XXX      |  | P120-P600                   |
| <b>4-1/2" x 30' PSA</b><br>23-573-XXX       |  | P80-400                     |

# GOLD SOFT - 23 Series

- Designed for final sanding of e-coats, primers, sealers and panel blends
- Durable, aluminum oxide grain delivers a long lasting, smooth cut
- A special stearate coating is used to resist clogging and loading
- 6" 15-hole discs can be used with or without vacuum

## TECHNICAL SPECIFICATIONS

|                   |                      |
|-------------------|----------------------|
| <b>Grain</b>      | Aluminum oxide       |
| <b>Bonding</b>    | Resin over resin     |
| <b>Backing</b>    | C-paper with PE-foam |
| <b>Coating</b>    | Semi-open            |
| <b>Color</b>      | Gold                 |
| <b>Attachment</b> | Grip                 |



| Available Sizes                      | Available Grits  |
|--------------------------------------|------------------|
| <b>6" 15-Hole Grip</b><br>23-645-XXX | P320, P500, P800 |

# COARSE CUT - 40 Series

- Aggressive and fast cutting in coarse grades and is long lasting
- Specially reinforced paper exclusive to Mirka provides superior grain support
- Semi-open coat produces a consistent scratch pattern, while resisting loading

## TECHNICAL SPECIFICATIONS

|                   |                                     |
|-------------------|-------------------------------------|
| <b>Grain</b>      | Aluminum oxide                      |
| <b>Bonding</b>    | Resin over resin, Progressive Bond® |
| <b>Backing</b>    | Specially reinforced F-paper        |
| <b>Coating</b>    | Semi-open                           |
| <b>Color</b>      | Maroon                              |
| <b>Attachment</b> | Grip and PSA                        |



| Available Sizes                                       |  | Available Grits           |
|---|--|---------------------------|
| <b>3" Grip</b><br>40-608-XXX                          |  | P40, P80                  |
| <b>5" Grip</b><br>40-612-XXX                          |  | P36-P150                  |
| <b>5" PSA</b><br>40-332-XXX                           |  | P36-P150                  |
| <b>5" 5-Hole Grip</b><br>40-614-XXX                   |  | P40-P150                  |
| <b>6" Grip</b><br>40-622-XXX                          |  | P36-P120                  |
| <b>6" PSA</b><br>40-341-XXX                           |  | P36-P150                  |
| <b>6" 6-Hole Grip</b><br>40-624-XXX                   |  | P36-P120                  |
| <b>8" Grip</b><br>40-631-XXX                          |  | P36-P150                  |
| <b>8" PSA</b><br>40-352-XXX                           |  | P36-P150                  |
| <b>8" 8-Hole Grip</b><br>40-632-XXX                   |  | P40, P80, P150            |
| <b>2-3/4" x 16-1/2" Grip</b><br>40-663-XXX            |  | P36-P150                  |
| <b>2-3/4" x 16-1/2" PSA</b><br>40-364-XXX             |  | P36, P40, P80, P100, P120 |
| <b>2-3/4" x 16-1/2" 18-Hole Grip</b><br>XS-40-698-XXX |  | P40, P80                  |

# BASECUT® - 22 Series

- Economical option
- Aggressive initial cut
- Resists clogging and loading

## TECHNICAL SPECIFICATIONS

|                   |   |
|-------------------|---|
| <b>Grain</b>      | Aluminum oxide  |
| <b>Bonding</b>    | Resin over resin  |
| <b>Backing</b>    | P40-P80 D-paper, P100-P800 C-paper, P1000-P1500 B-paper |
| <b>Coating</b>    | Semi-open   |
| <b>Color</b>      | Blue  |
| <b>Attachment</b> | Grip, PSA and Plain                                     |



| Available Sizes                               |  | Available Grits |
|---|--|-----------------|
| <b>5" Grip</b><br>22-612-XXX                  |  | P40-P800        |
| <b>5" PSA</b><br>22-332-XXX                   |  | P600, P800      |
| <b>5" PSA Linkrol</b><br>22-314-XXX           |  | P80-P500        |
| <b>6" Grip</b><br>22-622-XXX                  |  | P40-P800        |
| <b>6" PSA</b><br>22-341-XXX                   |  | P40, P600, P800 |
| <b>6" PSA Linkrol</b><br>22-342-XXX           |  | P80-P500        |
| <b>8" PSA</b><br>22-352-XXX                   |  | P40, P80        |
| <b>8" Grip</b><br>22-631-040                  |  | P40             |
| <b>4-1/2" x 5-1/2" Plain</b><br>XS-22-114-XXX |  | P80, P180, P220 |
| <b>3.67" x 9" Plain</b><br>XS-22-121-XXX      |  | P40-P320        |
| <b>4-1/2" x 11" Plain</b><br>XS-22-124-XXX    |  | P120            |
| <b>2-3/4" x 16-1/2" PSA</b><br>22-364-XXX     |  | P40, P80        |
| <b>9" x 11" Plain</b><br>22-101-XXX           |  | P40-P400        |
| <b>4-1/2" x 30' PSA</b><br>22-573-XXX         |  | P80-P320        |
| <b>2-3/4 x 75' PSA Autokut</b><br>22-580-XXX  |  | P80-P400        |

# CARATFLEX - 02 Series

- Designed for hand sanding of wood, sealers, paint and lacquers
- The latex impregnated paper backing is highly flexible and ideal for profile sanding
- An advanced stearate coating is used to resist loading
- Resin bonding improves grain adherence and product life
- Silicon carbide grain delivers an exceptionally sharp, smooth cut



## TECHNICAL SPECIFICATIONS

|                   |                                     |
|-------------------|-------------------------------------|
| <b>Grain</b>      | Silicon carbide                     |
| <b>Bonding</b>    | Resin over resin, Progressive Bond® |
| <b>Backing</b>    | P80-P120 B-paper, P150-P400 A-paper |
| <b>Coating</b>    | Semi-open                           |
| <b>Color</b>      | Gray                                |
| <b>Attachment</b> | Grip, PSA and Plain                 |



| Available Sizes                               |  | Available Grits |
|---|--|-----------------|
| <b>5" Grip</b><br>02-612-XXX                  |  | P80, P180, P320 |
| <b>5" PSA Linkrol</b><br>02-314-XXX           |  | P80-P400        |
| <b>4-1/2" x 5-1/2" Plain</b><br>XS-02-114-XXX |  | P180-P320       |
| <b>3.67" x 9" Plain</b><br>XS-02-121-XXX      |  | P180-P400       |
| <b>4-1/2" x 11"</b><br>XS-02-124-XXX          |  | P220, P240      |
| <b>9" x 11" Plain</b><br>02-101-XXX           |  | P80-P400        |
| <b>2-1/2" PSA*</b><br>02-560-XXX              |  | P120-P320       |
| <b>3-1/4" PSA*</b><br>02-570-XXX              |  | P320            |

\* Special order ONLY.  
Lengths vary from 70" for P120 to 125" for P320

# WATERPROOF - 21 Series

- Waterproof paper offers full resin bonding on quality latex coated paper
- Ideal for nib sanding - to remove dirt and imperfections from paint surfaces
- Consistent and precise manufacturing process provides fine scratch pattern for improved finish



### TECHNICAL SPECIFICATIONS

|                   |   |
|-------------------|---|
| <b>Grain</b>      | Aluminum oxide P80–P360, Silicon carbide P400–P3000 |
| <b>Bonding</b>    | Resin over resin                                    |
| <b>Backing</b>    | P80–P120 C-paper, P150–2500 B-paper                 |
| <b>Coating</b>    | Closed  |
| <b>Color</b>      | Black   |
| <b>Attachment</b> | Grip, PSA and Plain                                 |



| Available Sizes                               |  | Available Grits |
|---|--|-----------------|
| <b>1-1/4" PSA</b><br>21-300-XXX               |  | P2500, P3000    |
| <b>1-3/8" PSA</b><br>21-800-XXX               |  | P1500, P2000    |
| <b>4-1/2" x 5-1/2" Plain</b><br>XS-21-114-XXX |  | P150-P1200      |
| <b>3.67" x 9" Plain</b><br>XS-21-121-XXX      |  | P400-P2500      |
| <b>5-1/2" x 11" Plain</b><br>21-118-XXX       |  | P1000-P2500     |
| <b>9" x 11" Plain</b><br>21-104-XXX           |  | P80-P2500       |

# HIOLIT XO (51) Series / JF (56) Series

- The rigid cotton cloth is highly tear resistant
- Removes stock quickly, while producing a high-quality surface finish
- The durable aluminum oxide grain delivers an exceptionally long lasting cut




### TECHNICAL SPECIFICATIONS

|                   |  |
|-------------------|--|
| <b>Grain</b>      | Aluminum oxide   |
| <b>Bonding</b>    | Resin over resin   |
| <b>Backing</b>    | X-weight cotton cloth (51)<br>J-weight cotton cloth (56) |
| <b>Coating</b>    | Closed   |
| <b>Color</b>      | Maroon   |
| <b>Attachment</b> | PSA  |



| Available Sizes                        |  | Available Grits |
|--|--|-----------------|
| <b>5" PSA</b><br>56-332-XXX            |  | P60-P400        |
| <b>5" Heavy Duty PSA</b><br>51-332-XXX |  | P40-P150        |

# ABRASIVE SPONGES

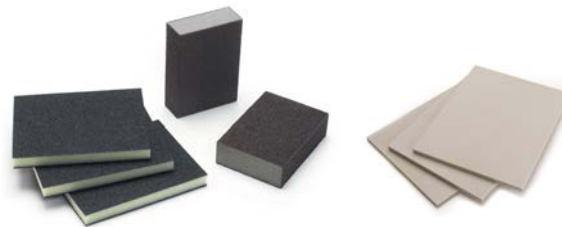

### TECHNICAL SPECIFICATIONS

|                |                |
|----------------|----------------|
| <b>Grain</b>   | Aluminum oxide |
| <b>Bonding</b> | Resin          |
| <b>Backing</b> | Foam           |
| <b>Coating</b> | Closed         |



| Available Sizes                           | Available Grits | Description                              |
|---|-----------------|--|
| <b>2-3/4" x 4-3/4" x 1/2"</b><br>1351-XXX | 100-400         | Double sided abrasive sponge             |
| <b>2-3/4" x 4" x 1"</b><br>1353-XXX       | 60-220          | Four sided abrasive sponge               |
| <b>3" x 4" x 1/2"</b><br>MGS34-150B       | 150             | Single sided grip backed abrasive sponge |
| <b>4-1/2" x 5-1/2" x 1/4"</b><br>1355-XXX | 60-600          | Single sided abrasive sponge             |



# MIRLON TOTAL® - 18 Series

- Open design is thinner and more flexible than traditional non-woven pads
- Three dimensional structure made with cut fiber strands coated with resin and abrasive
- Consistent coating of aluminum oxide (VF 360) and silicon carbide (UF 1500, MF 2500) abrasive grains provide uniform, dense scratch pattern
- Very flexible, ideal for use on contoured surfaces



## TECHNICAL SPECIFICATIONS

|                |   |
|----------------|---|
| <b>Grain</b>   | Aluminum oxide (VF), Silicon carbide (UF, MF) |
| <b>Bonding</b> | Resin   |
| <b>Backing</b> | Non-Woven                                     |
| <b>Coating</b> | Three dimensional Total Coating               |
| <b>Color</b>   | Red (VF), Gray (UF), Gold (MF)                |



| Available Sizes                   | Available Grits |
|-----------------------------------|-----------------|
| <b>4-1/2" x 9"</b><br>18-118-447  | VF (360) Red    |
| <b>4-1/2" x 9"</b><br>18-118-448  | UF (1500) Gray  |
| <b>4-1/2" x 9"</b><br>18-118-449  | MF (2500) Gold  |
| <b>4-1/2" x 33'</b><br>18-573-373 | VF (360) Red    |
| <b>4-1/2" x 33'</b><br>18-573-943 | UF (1500) Gray  |


# MIRLON - 18 Series

- Three dimensional structure made with cut fiber strands coated with resin and abrasive
- Consistent coating of aluminum oxide (VF) and silicon carbide (UF) abrasive grains provide more uniform scratch pattern
- Very flexible, ideal for use on contoured surfaces



## TECHNICAL SPECIFICATIONS

|                |   |
|----------------|---|
| <b>Grain</b>   | Aluminum oxide (VF), Silicon carbide (UF) |
| <b>Bonding</b> | Resin                                     |
| <b>Backing</b> | Non-Woven                                 |
| <b>Coating</b> | Three dimensional                         |
| <b>Color</b>   | Maroon (VF), Gray (UF)                    |



| Available Sizes                    | Available Grits    |
|------------------------------------|--------------------|
| <b>5" Disc</b><br>18-232-VBF       | Very Fine (Maroon) |
| <b>6" Disc</b><br>18-241-447       | Very Fine (Maroon) |
| <b>6" Disc</b><br>18-241-448       | Ultra Fine (Gray)  |
| <b>6" x 9" Pad</b><br>18-111-447   | Very Fine (Maroon) |
| <b>6" x 9" Pad</b><br>18-111-448   | Ultra Fine (Gray)  |
| <b>4" x 33' Roll</b><br>18-573-447 | Very Fine (Maroon) |
| <b>4" x 33' Roll</b><br>18-573-448 | Ultra Fine (Gray)  |







# POLARSHINE® - POLISHING COMPOUNDS

Available Sizes

**250ml**

**1L**

**5L**

**17L**

Part Number

*PC35-025L*

*PC35-1L*

*PC35-5L*

*PC35-17L*



## POLARSHINE® 35 PC35

- An aggressive polishing compound for removal of P800 and finer sanding scratches, or for heavily oxidized surfaces.
- Can also be used for removal of fine orange peel
- Ideal for gelcoats, refinish coatings and composites
- Silicone free

Available Sizes

**1L**

Part Number

*PC15-1L*



## POLARSHINE® 15 PC15

- A medium coarse polishing compound for removal of P1200 and finer sanding scratches or for oxidized surfaces and water mark removal on refinish coatings
- Also suitable for removal and leveling of fine orange peel
- Silicone free

Available Sizes

**1L**

Part Number

*PC12-1L*



## POLARSHINE® 12 PC12

- Designed for single step polishing in AOEM/Tier1 applications
- Removes scratches from P2500 or higher
- Perfect balance of final gloss and speed
- Water based and silicone free

Available Sizes

**250ml**

**1L**

**5L**

Part Number

*PC10-025L*

*PC10-1L*

*PC10-5L*



## POLARSHINE® 10 PC10

- Medium duty compound can buff and polish by simply changing pads
- Removes sanding scratches without fillers
- Suitable for all paint systems including scratch resistant clear coats
- Silicone free

Available Sizes

**1L**

**5L**

Part Number

*PC8-1L*

*PC8-5L*



## POLARSHINE® 8 PC8

- Designed for single step polishing in AOEM/Tier1 applications
- Polarshine® 8 permanently removes sanding and swirl marks while producing a high gloss finish
- Designed to keep surface temperature low when polishing
- Suitable for use on all paint systems
- Silicone free

Available Sizes

**1L**

Part Number

*PC5-1L*



## POLARSHINE® 5 PC5

- Polarshine® 5 leaves a high gloss finish without swirl marks
- Removes compound swirls and fine sanding marks
- A medium-fine polish for cleaning and refreshing surfaces
- Suitable for hologram removal
- Silicone free

Available Sizes

**1L**

Part Number

*PC3-1L*



## POLARSHINE® 3 PC3

- An ultra-fine polishing compound for protecting the high gloss finish on both original paint work and repainted surfaces
- Polishes and seals surfaces
- Contains carnauba wax
- Leaves a high gloss shine



# POLISHING PADS

## Aggressive cutting

Twisted Wool  
Polishing Pad



**3" dia.**  
*MPADTW-3*

**6" dia. x 1"**  
*MPADTW-6*

**7.5" dia. x 1"**  
*MPADTW-7.5*

**7.5" dia. x 1-1/4"**  
*MPADTW-7.5-1.25*

**7.5" dia. x 1-1/2"**  
*MPADTW-7.5-1.5*

**8" dia. x 1" Double Sided**  
*MPADDS-8*

**8" dia. x 1.25" Double Sided**  
*MPADDS-8-1.25*

Available Sizes

## Medium cutting

Yellow Twisted  
Acrylic Wool  
Polishing Pad



**7.5" dia. x 1"**  
*MPADWY-7.5*


**7.5" dia. x 1-1/4"**  
*MPADWY-7.5-1.25*

**8" dia. x 1-1/4" Double Sided**  
*MPADDSY-8-1.25*

**7.5" dia. x 1-1/2"**  
*MPADWY-7.5-1.5*

Available Sizes

Yellow Foam Pad



**3-1/4" dia. x 1-1/4"**  
*MPADYF-3.25*


**6" dia. x 1" Flat**  
*MPADYF-6*

**6" dia. x 1" Waffle**  
*MPADYF-6W*

**8" dia. x 1-1/4" Waffle**  
*MPADYF-8W*

Available Sizes

Orange  
Foam Pad



**3-5/8" dia. x 1/2" Flat**  
*5723OP*

**3-1/4" dia. x 1-1/4" Waffle**  
*MPADOF-3.25W*

**6" dia. x 1-1/4" Waffle**  
*MPADOF-6W*

**8" dia. x 1-1/4" Dimple**  
*MPADOF-8*

Available Sizes

# POLISHING PADS

## Light Cutting

White  
Foam Pad



Available Sizes

**8" dia. x 1-1/4"**  
MPADWF-8

## Polishing

Lambs Wool  
Polishing Pad



Available Sizes

**3" dia. x 1"**  
MPADLW-3

**6" dia. x 1"**  
MPADLW-6

**7" dia. x 1"**  
MPADLW-7

**7.5" dia. x 1"**  
MPADLW-7.5

Black  
Foam Pad



Available Sizes

**3-5/8" dia. x 1/2" Flat**  
5723BP

**3-1/4" dia. x 1-1/4"**  
MPADBF-3.25

**6" dia. x 1"**  
MPADBF-6

**8" dia. x 1-1/4"**  
MPADBF-8

## Glass Polishing

Felt Pad



Available Sizes

**3" dia. x 1/4"**  
MPADFP-3

**5" dia. x 1/4"**  
MPADFP-5

*\* Used for glass polishing*

Available Sizes  
**1L**

Part Number  
PE3-1L



## POLARSHINE® E3

- Designed for polishing out scratches on glass surfaces
- Suitable for most glass types and removes marks permanently
- Water based & silicone free

**MIRKA**

# Experience Dust-Free Perfection

Mirka's Dust-Free sanding system keeps your projects free of dust, allowing for a fast, clean job.



woodworking



marine



automotive / OEM



industrial


Start your project out right with the Mirka® DEROS, the first random orbital electric sander using advanced brushless DC motor technology, without the need for an external power transformer.

With Mirka NET abrasives, no dust particle is more than 0.5mm from a dust extraction hole, eliminating the problem of dust clogging the abrasive, combined with the Mirka DEROS and MV-912 dust extractor for a complete dust-free sanding system. Together, this system means dust is no longer in the way and it's always possible to see exactly what is happening at the sanding surface, eliminating problems from over sanding.

## The Complete Mirka Dust-Free System



Mirka® DEROS and  
PROS Sander



Mirka Net Mesh  
Abrasives



Vacuum Hose



Dust Extractor

## Go Mobile!

Make your dust-free system completely mobile with the Mirka Smart Cart or Trolley. Stay organized with all of your tools, abrasives and accessories together and within reach while on the job.



# DUST-FREE SANDING MOBILE SOLUTIONS

## THE SMART CART

MAI-CART-912

The Mirka Smart Cart is the perfect solution to keep all your abrasives, tools, and dust extraction at one place in an integrated, dust-free sanding system

- Locking cabinet for inventory control
- Large 17-3/4" x 27" work surface
- Two 15-3/4" x 12" x 2-3/4" Drawers
- A movable platform is provided for the MV-912 dust extractor
- Dedicated tool rests are located on a wire rack
- Storage for polish bottles or aerosol cans
- Premium casters incorporate a foot pedal wheel brake and swivel lock
- Powder-coated steel construction offers years of dependable service.



Pre-packaged cart solutions are available. Products shown does not come with cart. Cart (MAI-CART-912) available separately.



## DUST EXTRACTOR TROLLEY

9190310111

- Steel cart features a fixed bottom shelf for a dust extractor, top adjustable-height shelf for abrasives, polishes, or other products
- Adjustable height hook on the left side for hanging a random orbital sander
- Velour strip on the right side to attach grip-faced hand blocks
- Two hooks are located on the back side to hang a dust extractor hose
- Larger rear wheels allow the cart to be rolled across gravel or uneven surfaces
- This trolley is designed to combine the MV-912 Dust Extractor together with any Mirka® random orbital sander to create a portable, dust-free sanding solution



Pre-packaged trolley solutions are available. Products shown do not come with trolley. Trolley (9190310111) available separately.





# DUST EXTRACTOR

MV-912

- Variable vacuum control powerful enough for use by multiple users with optional dual-operator fitting
- Integrated 400W outlet with Auto On/Off vacuum control for use with an electric tool
- Push & Clean filter cleaning system allows filter cleaning in seconds.
- Replaceable fleece filter for high efficiency and low maintenance costs
- Optional control box for Auto On/Off vacuum control with pneumatic sander
- Vacuum hoses are available in conventional and coaxial styles for use with hand blocks, pneumatic and electric Sanders

## TECHNICAL SPECIFICATIONS

|                       |                       |
|-----------------------|-----------------------|
| <b>Power</b>          | 840 W                 |
| <b>Input Voltage</b>  | 120 VAC               |
| <b>Airflow</b>        | 127 CFM               |
| <b>Volume of tank</b> | 7.9 gal               |
| <b>Dimensions</b>     | 14.2" x 17.7" x 23.6" |
| <b>Weight</b>         | 22 lbs                |
| <b>Sound pressure</b> | 62 dB                 |
| <b>Noise</b>          | 59 dB                 |

## ACCESSORIES



MV-912PB

- Pneumatic box
- Auto On/Off vacuum control for pneumatic sander



MV-412DOK

- Dual Operator Kit
- Allows use of two Sanders with one MV-912 dust extractor



MV-412FE

- Filter Element
- Use with MV-912 dust extractor



MV-912DB

- Dust Bag
- Use with MV-912 dust extractor



MAI-CART-AUX

- 36" Auxiliary air line and manifold assembly



M-9915G

- Microfiber cleaning cloth



- 91935000111 (Black)  
9193600111 (White)
- Dry guide coat



S-BLADE

- "Shark Blade" Denibbing tool



# DUST EXTRACTOR HOSES

## Electric Sander Hoses



MVHA-5 (18')



MVHA-10 (33')

- 1-1/2" x 18' (or 33') Coaxial electric/vacuum hose with 1-1/4" adapter (MV-412HA-ADAP)
- For use with Mirka® DEROS only

## Pneumatic Sander Hoses



MV-412HA (15')



MV-HA33 (33')

- 1-1/2" x 15' (or 33') Coaxial air supply/vacuum hose with 1-1/4" adapter (MV-412HA-ADAP)
- For use with Mirka® PROS or MR Series pneumatic tools

## Vacuum Hoses



MV-412HA-ADAP

- 1-1/4" x 18" Adapter for coaxial air supply or electric vacuum hose



MIN6519411

- 1-1/2" tapered to 1-1/4" x 12' vacuum hose



91100 - A

- 3/4" x 12' Vacuum hose and adapter for hand blocks



MIN6519711

- 1-1/2" x 33' Extension vacuum hose



# MIRKA® TOOLS & BACKUP PADS

1.25" TOOLS • 1.25" TOOLS • 1.25" TOOLS • 1.25" TOOLS • 1.25" TOOLS • 1.25" TOOLS • 1.25" TOOLS • 1.25" TOOLS

**Battery Powered**



## AOS130-B

- Non-vacuum battery sander
- Battery recharges in 40 minutes or less
- Orbital 3mm
- Used for denibbing in OEM, automotive and wood applications

| Orbit | RPM         | Weight  | Volts    | Noise | Vib m/s <sup>2</sup> |
|-------|-------------|---------|----------|-------|----------------------|
| 3 mm  | 4,000-8,000 | 1.3 lbs | 10.8 VDC | 61 dB | 2.5                  |



## AROS150-B

- Non-vacuum battery sander
- Battery recharges in 40 minutes or less
- Random Orbital 5mm
- Used for denibbing in OEM, automotive and wood applications

| Orbit | RPM         | Weight  | Volts    | Noise | Vib m/s <sup>2</sup> |
|-------|-------------|---------|----------|-------|----------------------|
| 5 mm  | 4,000-8,000 | 1.4 lbs | 10.8 VDC | 62 dB | 1.9                  |



## MAOS130

- Non-vacuum
- Orbital 3mm
- Used for denibbing in OEM, Automotive and wood applications
- Oscillating orbit results in a finer finish, leaving the surface easy to polish
- Twist lock pad attachment

| Orbit | RPM   | Pad Face | Weight   | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|-------|----------|----------|------|------|-------|----------------------|
| 3 mm  | 8,500 | PSA      | 1.32 lbs | 0.48 | 18   | 75 dB | 2.22                 |



## MROS125

- Non-vacuum
- Random orbital
- Used for denibbing in OEM, automotive and wood applications
- Constructed of lightweight and hi-tech materials
- Ergonomically designed for maximum performance & reduced operator fatigue
- 1/4 - 20 thread pad attachment

| Orbit  | RPM   | Pad Face | Weight   | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|--------|-------|----------|----------|------|------|-------|----------------------|
| 2.5 mm | 8,000 | PSA      | 1.06 lbs | 0.15 | 15   | 67 dB | 3.5                  |



## MROS150

- Non-vacuum
- Random orbital
- Quick lock attachment of the backing pad is fast and stable
- Perfect for sanding smaller surface areas
- Twist lock pad attachment

| Orbit | RPM   | Pad Face | Weight   | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|-------|----------|----------|------|------|-------|----------------------|
| 5 mm  | 8,000 | PSA      | 1.09 lbs | 0.15 | 15   | 71 dB | 2.33                 |



### MR-3

- Random orbital sander
- Non-vacuum
- Constructed of precision-molded composites for strength & durability
- Moisture-resistant composite rotors for long life and superior reliability
- Ergonomically designed for maximum performance & reduced operator fatigue

| Orbit  | RPM    | Pad Face | Weight   | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|--------|--------|----------|----------|------|------|-------|----------------------|
| 2.5 mm | 12,000 | PSA      | 1.12 lbs | 0.28 | 17   | 80 dB | 2                    |



### MR-3SGV

- Random orbital sander
- Self-generated vacuum
- 3/4" threaded vacuum fitting
- Constructed of precision-molded composites for strength & durability
- Moisture-resistant composite rotors for long life and superior reliability
- Ergonomically designed for maximum performance & reduced operator fatigue

| Orbit  | RPM    | Pad Face    | Weight  | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|--------|--------|-------------|---------|------|------|-------|----------------------|
| 2.5 mm | 12,000 | 6-Hole Grip | 1.3 lbs | 0.28 | 17   | 84 dB | 2.6                  |



### MR-350

- Random orbital sander
- Non-vacuum
- Constructed of precision-molded composites for strength & durability
- Moisture-resistant composite rotors for long life and superior reliability
- Ergonomically designed for maximum performance & reduced operator fatigue

| Orbit | RPM    | Pad Face | Weight   | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|--------|----------|----------|------|------|-------|----------------------|
| 5 mm  | 12,000 | PSA      | 1.12 lbs | 0.28 | 17   | 80 dB | 2                    |



### MR-350CV

- Vacuum-ready • 1-1/4" threaded vacuum fitting

| Orbit | RPM    | Pad Face    | Weight   | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|--------|-------------|----------|------|------|-------|----------------------|
| 5 mm  | 12,000 | 6-Hole Grip | 1.17 lbs | 0.28 | 17   | 80 dB | 2                    |



**MR-30**

- Rotary palm buffer
- Non-vacuum
- Ideal for small area topcoat and clearcoat polishing
- Moisture-resistant composite rotors for long life and superior reliability
- Fast polishing results when paired with wool or foam polishing pads
- Easy removal of sanding scratches

| Orbit | RPM   | Pad Face | Weight  | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|-------|----------|---------|------|------|-------|----------------------|
| 0     | 3,000 | Grip     | 1.5 lbs | 0.28 | 17   | 81 dB | 1.4                  |



**MR-30TH**

- Two-handed rotary polisher/sander
- Non-vacuum
- Ideal for small area topcoat and clearcoat polishing
- Moisture-resistant composite rotors for long life and superior reliability
- Ergonomically designed for two-handed use to reduce operator fatigue

| Orbit | RPM   | Pad Face | Weight  | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|-------|----------|---------|------|------|-------|----------------------|
| 0     | 3,000 | Grip     | 2.1 lbs | 0.28 | 17   | 85 dB | 1.2                  |



**MROP-312TH**

- Random orbital polisher/sander
- Non-vacuum
- Ideal for small area topcoat and clearcoat polishing
- Moisture-resistant composite rotors for long life and superior reliability
- Ergonomically designed for two-handed use to reduce operator fatigue
- Larger orbit offers fast polishing results and a swirl-free finish

| Orbit | RPM    | Pad Face | Weight  | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|--------|----------|---------|------|------|-------|----------------------|
| 12 mm | 10,000 | Grip     | 2.6 lbs | 0.37 | 19   | 80 dB | 5                    |



**MR-35SGV**

- Self-generated vacuum
- 1-1/4" threaded vacuum fitting
- Dimensions 2-3/4" x 5"

| Orbit | RPM    | Pad Face        | Weight  | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|--------|-----------------|---------|------|------|-------|----------------------|
| 3 mm  | 10,000 | Multi-Hole Grip | 1.6 lbs | 0.24 | 16   | 81 dB | 3.5                  |



### Mirka DEOS MID3530201US



- Low profile allows for easy maneuverability
- 3.2" x 5.2" grip faced, 3mm
- Ideal for narrow or small spaces
- Max OPM can be adjusted from 5,000-10,000opm
- Bluetooth connectivity pairs with MyMirka App

| Orbit | OPM           | Pad Face        | Weight | Noise |
|-------|---------------|-----------------|--------|-------|
| 3 mm  | 5,000 -10,000 | Multi-Hole Grip | 2 lbs  | 69 dB |



### Mirka DEOS MID3830201US



- Low profile allows for easy maneuverability
- 2.75" x 8" grip faced, 3mm
- Ideal for automotive repair sanding
- Max OPM can be adjusted from 5,000-10,000opm
- Bluetooth connectivity pairs with MyMirka App

| Orbit | OPM           | Pad Face        | Weight  | Noise |
|-------|---------------|-----------------|---------|-------|
| 3 mm  | 5,000 -10,000 | Multi-Hole Grip | 2.2 lbs | 71 dB |



### MR-38CV-1

- Orbital sander
- Dimensions 2-3/4" x 7-3/4"
- Vacuum-ready
- 1-1/4" threaded vacuum fitting
- Moisture-resistant composite rotors for long life and superior reliability
- Sands quickly and provides a uniform surface finish

| Orbit | RPM    | Pad Face        | Weight  | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|---------|------|------|-------|-----------|
| 3 mm  | 10,000 | Multi-Hole Grip | 2.1 lbs | 0.24 | 16   | 75 dB | 3.3       |



### MR-38SGV

- Self-generated vacuum
- Dimensions 2-3/4" x 7-3/4"
- 1-1/4" threaded vacuum fitting

| Orbit | RPM    | Pad Face        | Weight  | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|---------|------|------|-------|-----------|
| 3 mm  | 10,000 | Multi-Hole Grip | 2.1 lbs | 0.24 | 16   | 85 dB | 2.8       |



**MR-5**

- Random orbital sander
- Non-vacuum
- Constructed of precision-molded composites for strength & durability
- Moisture-resistant composite rotors for long life and superior reliability

| Orbit | RPM    | Pad Face | Weight  | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|----------|---------|------|------|-------|-----------|
| 5 mm  | 12,000 | PSA      | 1.7 lbs | 0.28 | 17   | 79 dB | 3.7       |

**MR-5V**

- Vacuum-ready • 1-1/4" threaded vacuum fitting

| Orbit | RPM    | Pad Face        | Weight  | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|---------|------|------|-------|-----------|
| 5 mm  | 12,000 | Multi-Hole Grip | 1.8 lbs | 0.28 | 17   | 77 dB | 2.4       |



**MR-5SGV**

- Self-generated vacuum • 1-1/4" threaded vacuum fitting

| Orbit | RPM    | Pad Face        | Weight   | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|----------|------|------|-------|-----------|
| 5 mm  | 12,000 | Multi-Hole Grip | 1.85 lbs | 0.28 | 17   | 91 dB | 2.5       |

**MR-508**

- Random orbital sander
- Non-vacuum
- Larger orbit for more aggressive sanding applications
- Constructed of precision-molded composites for strength & durability
- Moisture-resistant composite rotors for long life and superior reliability

| Orbit | RPM    | Pad Face | Weight | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|----------|--------|------|------|-------|-----------|
| 8 mm  | 12,000 | PSA      | 1.7lbs | 0.28 | 17   | 74 dB | 3.5       |



**MR-508SGV**

- Self-generated vacuum • 1-1/4" threaded vacuum fitting

| Orbit | RPM    | Pad Face        | Weight   | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|----------|------|------|-------|-----------|
| 8 mm  | 12,000 | Multi-Hole Grip | 1.85 lbs | 0.28 | 17   | 91 dB | 3.3       |



**MR-525**

- Random orbital sander
- Non-vacuum
- Constructed of precision molded composites for strength & durability
- Counter balanced for specific size backup pad
- Moisture-resistant composite rotors for long life and superior reliability

| Orbit  | RPM    | Pad Face | Weight  | HP   | SCFM | Noise | Vib m/s 2 |
|--------|--------|----------|---------|------|------|-------|-----------|
| 2.5 mm | 12,000 | Grip     | 1.7 lbs | 0.28 | 17   | 80 dB | 2.1       |





### MR-510TH

- Two-handed random orbital sander
- Non-vacuum
- Larger orbit for aggressive sanding applications
- Constructed of precision-molded composites for strength & durability
- Moisture-resistant composite rotors for long life and superior reliability

| Orbit | RPM    | Pad Face | Weight  | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|--------|----------|---------|------|------|-------|----------------------|
| 10 mm | 12,000 | PSA      | 2.7 lbs | 0.46 | 21   | 85 dB | 3.4                  |



### MROP-512TH

- Two-handed random orbital polisher/sander
- Non-vacuum
- Larger orbit for larger sanding applications
- Constructed of precision-molded composites for strength & durability
- Counter-balanced for specific size backup pad
- Moisture-resistant composite rotors for long life and superior reliability

| Orbit | RPM    | Pad Face | Weight  | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|--------|----------|---------|------|------|-------|----------------------|
| 12 mm | 12,000 | PSA      | 2.9 lbs | 0.46 | 21   | 85 dB | 3.4                  |



### MID55020CAUS (Mirka® DEROS)



- Random orbital electric sander (110V)
- Vacuum-ready
- 1-1/4" hose threaded vacuum fitting
- Brushless DC motor technology
- Quick connect fitting for the dust extraction hose
- Digitally controlled with variable speeds
- Unique shroud system with brake seal allows minimal internal air leakage for improved dust extraction, even at low suction power

| Orbit | RPM            | Pad Face        | Weight  | Watts | Noise | Vib m/s <sup>2</sup> |
|-------|----------------|-----------------|---------|-------|-------|----------------------|
| 5 mm  | 4,000 - 10,000 | Multi-Hole Grip | 2.2 lbs | 350   | 82 dB | 3.2                  |

### MIRKA DEROS SPARE PARTS



MIE6517211  
110V Power Cord





**MRP-550CV (Mirka® PROS)**

- Random orbital sander
- Vacuum-ready
- 1-1/4" hose threaded vacuum fitting
- Unique shroud system with brake seal allows minimal internal air leakage for improved dust extraction, even at low suction power
- Quick connect fitting for the dust extraction hose
- Optimized ergonomics that make it user-friendly and comfortable to grip for long operating period

| Orbit | RPM    | Pad Face        | Weight | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|--------|------|------|-------|-----------|
| 5 mm  | 12,000 | Multi-Hole Grip | 2 lbs  | 0.28 | 17   | 74 dB | 2.4       |

**MRP-580CV (Mirka® PROS)**

| Orbit | RPM    | Pad Face        | Weight | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|--------|------|------|-------|-----------|
| 8 mm  | 12,000 | Multi-Hole Grip | 2 lbs  | 0.28 | 17   | 74 dB | 3.8       |



**MRP-550SGV (Mirka® PROS SGV)**

- Easy to reach speed regulator
- Unique shroud system with brake seal allows excellent dust extraction, even at low suction power
- Optimized ergonomics make it comfortable to grip for long operating periods
- Cover lifts for access to the air supply connection, locking the lever in the off position
- Fleece dust bag has a large capacity which means fewer bag changes
- Fleece dust bag has a longer product life
- No need for a safety nylon bag for protection
- Can be used with the Mirka paper bag system (must use nylon bag also)

| Orbit | RPM    | Pad Face        | Weight  | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|---------|------|------|-------|-----------|
| 5 mm  | 12,000 | Multi-Hole Grip | 1.8 lbs | 0.28 | 17   | 81 dB | 2.8       |

**MIRKA PROS SGV ACCESSORIES**



MRP-SGVB  
Fleece Dustbag  
(3 Pack / 8.5" x 12.5")



MPP9023  
■ 1-1/2" x 5.9' (Mirka PROS SGV)  
Coaxial Pneumatic/Vacuum Hose

**Spare Parts**

- MPP0413
  - Ejector Tube
- MPP0416
  - Hose Connector
- MPP9022
  - Retainer and O-ring kit



### MR-6

- Random orbital sander
- Non-Vacuum
- Constructed of precision-molded composites for strength & durability
- Moisture-resistant composite rotors for long life and superior reliability

| Orbit | RPM    | Pad Face | Weight   | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|----------|----------|------|------|-------|-----------|
| 5 mm  | 12,000 | PSA      | 1.74 lbs | 0.28 | 17   | 79 dB | 3.7       |



### MR-6V

- Vacuum-ready • 1-1/4" threaded vacuum fitting

| Orbit | RPM    | Pad Face        | Weight  | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|---------|------|------|-------|-----------|
| 5 mm  | 12,000 | Multi-Hole Grip | 1.9 lbs | 0.28 | 17   | 77 dB | 3.1       |



### MR-6SGV

- Self-generated vacuum
- 1-1/4" threaded vacuum fitting

| Orbit | RPM    | Pad Face        | Weight | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|--------|------|------|-------|-----------|
| 5 mm  | 12,000 | Multi-Hole Grip | 2 lbs  | 0.28 | 17   | 85 dB | 3.5       |

### MR-608



- Random orbital sander
- Non-vacuum
- Constructed of precision-molded composites for strength & durability
- Counter balanced for specific size backup pad
- Moisture-resistant composite rotors for long life and superior reliability

| Orbit | RPM    | Pad Face | Weight | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|----------|--------|------|------|-------|-----------|
| 8 mm  | 12,000 | PSA      | 2 lbs  | 0.28 | 17   | 75 dB | 3.5       |



### MR-608SGV

- Self-generated vacuum
- 1-1/4" threaded vacuum fitting

| Orbit | RPM    | Pad Face        | Weight  | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|---------|------|------|-------|-----------|
| 8 mm  | 12,000 | Multi-Hole Grip | 2.2 lbs | 0.28 | 17   | 82 dB | 3.3       |



**MR-610TH**

- Two-handed random orbital sander
- Non-vacuum
- Constructed of precision-molded composites for strength & durability
- Counter-balanced for specific size backup pad
- Moisture-resistant composite rotors for long life and superior reliability

| Orbit | RPM    | Pad Face | Weight  | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|--------|----------|---------|------|------|-------|----------------------|
| 10 mm | 12,000 | PSA      | 2.8 lbs | 0.46 | 21   | 87 dB | 3.3                  |

**MR-610THCV**

- Vacuum-ready
- 1-1/4" threaded vacuum fitting

| Orbit | RPM    | Pad Face        | Weight  | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|--------|-----------------|---------|------|------|-------|----------------------|
| 10 mm | 12,000 | Multi-Hole Grip | 2.9 lbs | 0.46 | 21   | 90 dB | 3.3                  |



**MR-625**

- Random orbital sander
- Non-vacuum
- Constructed of precision-molded composites for strength & durability
- Counter balanced for specific size backup pad
- Moisture-resistant composite rotors for long life and superior reliability

| Orbit | RPM    | Pad Face | Weight   | HP   | SCFM | Noise | Vib m/s <sup>2</sup> |
|-------|--------|----------|----------|------|------|-------|----------------------|
| 6 mm  | 12,000 | PSA      | 1.87 lbs | 0.28 | 17   | 83 dB | 3.3                  |



**MID65020CAUS (Mirka® DEROS)**



- Random orbital electric sander (110V)
- Vacuum-ready
- 1-1/4" hose threaded vacuum fitting
- Brushless DC motor technology
- Quick connect fitting for the dust extraction hose
- Digitally controlled with variable speeds
- Unique shroud system with brake seal allows minimal internal air leakage for improved dust extraction, even at low suction power

| Orbit | RPM           | Pad Face        | Weight  | Watts | Noise | Vib m/s <sup>2</sup> |
|-------|---------------|-----------------|---------|-------|-------|----------------------|
| 5 mm  | 4,000 -10,000 | Multi-Hole Grip | 2.2 lbs | 350   | 71 dB | 3.4                  |

**MIRKA DEROS SPARE PARTS**



MIE6517211  
110V Power Cord





**MR-850THCV**

- Two-handed random orbital sander
- Vacuum ready
- 1-1/4" threaded vacuum fitting
- Heavy duty performance and durability with low profile and ergonomic styling
- Easy to handle and results in excellent stability during operation
- Side handle provides an extra gripping point to increase control and reduce effort
- Excellent for industrial applications and sanding larger surfaces

| Orbit | RPM    | Pad Face        | Weight  | HP   | SCFM | Noise | Vib m/s 2 |
|-------|--------|-----------------|---------|------|------|-------|-----------|
| 5 mm  | 10,000 | Multi-Hole Grip | 3.4 lbs | 0.46 | 23   | 77 dB | 4.8       |

**Hand Sanding Blocks**

**9116F**

Flexible Grip Faced  
Multi-Hole Vacuum Block  
2-3/4" x 16-1/2"



**9116R**

Rigid Grip Faced  
Multi-Hole Vacuum Block  
2-3/4" x 16-1/2"



**MVHB35**

Grip Faced  
Multi-Hole Vacuum Block  
2-3/4" x 5"



**MVHB38**

Grip Faced  
Multi-Hole Vacuum Block  
2-3/4" x 7-1/2"



**MVHB38-K**

Grip Faced w/4 changeable attachments  
(Convex, Concave, Slightly Concave and Flat)  
Multi-Hole Vacuum Block  
2-3/4" x 7-1/2"



**AF4417**

Grip Faced DuraBlock  
Hand Sanding Block  
2-5/8" x 5-1/2"



**AF4418**

Grip Faced DuraBlock  
Hand Sanding Block  
2-5/8" x 11"



**AF4419**

Grip Faced DuraBlock  
Hand Sanding Block  
2-5/8" x 16"



Vacuum Hand Sanding

## 1.25" Backup Pads

### 1125G

Grip Faced  
Backup Pad  
1/4 - 20 thread



### 1125

Vinyl Faced  
Backup Pad  
1/4 - 20 thread



### 1125S

Vinyl Soft Faced  
Backup Pad  
1/4 - 20 thread



### 1125S-R

Vinyl Soft Faced  
Backup Pad  
w/ Twist-Lock Attachment



### 1125SG-R

Grip Soft Faced  
Backup Pad  
w/ Twist-Lock Attachment



### 1125H-R

Vinyl Hard Faced  
Backup Pad  
w/ Twist-Lock Attachment



## 3" Backup Pads

### 102GG

2-7/8" Grip Faced  
Backup Pad  
5/16 - 24 thread



### 913G

Grip Faced Backup Pad  
1/4 - 20 thread



### 913GV

Grip Faced Multi-Hole Vacuum Pad  
1/4 - 20 thread



## 3.5" Backup Pads

### 103

Vinyl Faced Backup Pad  
5/16 - 24 thread



### 103HD

Heavy Duty Vinyl Faced Backup Pad  
5/16 - 24 thread







## 5" Backup Pads - Vinyl Faced For PSA

### 105

Backup Pad  
5/16 - 24 thread



### 105H

Backup Pad  
Hardened Shank  
5/16 - 24 thread



### 105MS

Medium-Soft  
Backup Pad  
5/16 - 24 thread



### 105HD

Heavy Duty  
Backup Pad  
5/16 - 24 thread



### 105S

Soft Backup Pad  
5/16 - 24 thread



### 105P

Backup Pad  
w/ Flexible Edge  
5/16 - 24 thread



### 105V

5-Hole Vacuum  
Backup Pad  
5/16 - 24 thread



### 105SV

Soft 5-Hole Vacuum  
Backup Pad  
5/16 - 24 thread





## 6" Backup Pads - Vinyl Faced For PSA

**106**  
Backup Pad  
5/16 - 24 thread



**106S**  
Soft Backup Pad  
5/16 - 24 thread



**106P**  
Backup Pad  
5/16 - 24 thread



**106V**  
6-Hole Vacuum  
Backup Pad  
5/16 - 24 thread



## 8" Backup Pads - Grip Faced For Hook & Loop

**908GV**  
Multi-Hole  
Vacuum Pad  
for MR-850THCV



## Rectangular Backup Pads


**934**  
Vinyl Faced  
Backup Pad  
3" x 4"



**934GV**  
Grip Faced  
Multi-Hole Backup Pad  
3" x 4"



**938GV**  
Grip Faced  
Multi-Hole Backup Pad  
2-3/4" x 7-3/4"



**9135**  
Multi-Hole  
Interface Pad  
3" x 5"



**9935**  
Multi-Hole  
Pad Saver  
3" x 5"



**935GV**  
Grip Faced  
Multi-Hole Backup Pad  
w/pad saver  
3" x 5"



**Interface Pads**

**1022SF**

Grip Soft Faced  
2-7/8" dia. 3/4" thick

**1033**

Grip Faced  
3" dia. 1/2" thick

**1033CH**

Grip Faced  
with 7/8" Hole  
3" dia. 1/2" thick

**1055F**

Grip Firm Faced  
5-Hole  
5" dia. 3/8" thick

**1055Y**

Grip Faced  
5-Hole  
5" dia. 1/2" thick

**1066**

Grip Faced  
6-Hole  
6" dia. 1/2" thick

**1066F**

Grip Firm Faced  
6" dia. 3/8" thick

**1066SF**

Grip Soft Faced  
6" dia. 3/4" thick

**1088**

Grip Faced  
8-Hole  
8" dia. 1/2" thick

**9133**

Grip Faced  
Multi-Hole  
3" dia. 3/8" thick

**91495**

Grip Faced Block  
Multi-Hole  
2-3/4" x 5" x 3/8"

**91505**

Grip Faced Block  
Multi-Hole  
2-3/4" x 7-3/4" x 3/8"

**91528**

Grip Faced  
Multi-Hole  
5" dia. 3/8" thick

**9155**

Grip Faced  
Multi-Hole  
5" dia. 3/8" thick

**9155-5**

Grip Faced  
Multi-Hole  
5" dia. 5 mm thick

**9166**

Grip Faced  
Multi-Hole  
6" dia. 3/8" thick

**9166-5**

Grip Faced  
Multi-Hole  
6" dia. 5 mm thick

Example Images



**Protector Pads**

**9947**

Grip Faced  
Multi-Hole  
3" dia. 1/8" thick

**99528**

Grip Faced  
Multi-Hole  
5" dia. 1/8" thick

**9955**

Grip Faced  
Multi-Hole  
5" dia. 1/8" thick

**9956**

Grip Faced  
Multi-Hole  
6" dia. 1/8" thick

**9958**

Grip Faced  
Multi-Hole  
8" dia. 1/8" thick

**MPA-0674**

Grip Faced  
Multi-Hole  
w/ palm hook  
6" dia. 1/8" thick

**9134**

Grip Faced  
Multi-Hole  
3" x 4" x 1/8"

**9138**

Grip Faced  
Multi-Hole  
2-3/4" x 7-3/4" x 1/8"

Example Images



# GRIT COMPARISON CHART

| MICRON | US CAMI | FEPA 'P' | JAPAN JIS |
|--------|---------|----------|-----------|
| 500    | 36      | 36       | 36        |
| 430    | 40      |          |           |
| 425    |         | 40       |           |
| 350    | 50      |          | 40        |
| 336    |         | 50       |           |
| 300    |         |          | 50        |
| 270    | 60      | 60       |           |
| 260    |         |          |           |
| 250    |         |          | 60        |
| 210    |         |          | 70        |
| 200    |         | 80       |           |
| 192    | 80      |          |           |
| 177    |         |          | 80        |
| 162    |         | 100      |           |
| 149    |         |          | 90        |
| 140    | 100     |          |           |
| 125    |         | 120      | 100       |
| 116    | 120     |          |           |
| 100    |         | 150      | 120       |
| 93     | 150     |          |           |
| 82     | 180     | 180      | 150       |
| 68     | 220     | 220      | 180       |
| 60     |         | 240      | 240       |
| 52     | 240     | 280      | 280       |
| 46     |         | 320      | 320       |
| 42     | 280     |          |           |
| 40     |         | 360      | 360       |
| 35     | 320     | 400      | 400       |
| 30     |         | 500      |           |
| 28     | 360     |          | 500       |
| 26     |         | 600      | 600       |
| 22     | 400     | 800      | 700       |
| 18     | 500     | 1000     | 800       |
| 15     | 600     | 1200     | 1000      |
| 13     |         | 1500     | 1200      |
| 10     |         | 2000     | 1500      |
| 8      |         | 2500     | 2000      |
| 7      |         | 3000     | 2500      |
| 6      |         |          |           |
| 5      |         | 5000     | 3000      |
| 3      |         |          | 4000      |



**KWH Mirka Ltd**

Pensalavägen 210  
FI-66850 Jeppo  
Finland  
Tel. +358 20 760 2111  
Telefax +358 20 760 2290  
[www.mirka.com](http://www.mirka.com)

**Mirka USA**

2375 Edison Blvd.  
Twinsburg, Ohio 44087  
USA  
Tel. +1 330 963 6421  
Fax +1 330 963 6427  
[www.mirka.com](http://www.mirka.com)  
[sales.us@mirka.com](mailto:sales.us@mirka.com)

