

DISTRIBUTED BY:  
Pro Wood Finishes  
14622 Southlawn Lane  
Rockville MD 20850  
Ph: (301) 424-3033

## Tough chemical protection unparalleled comfort

- Three layer design for superior protection against harsh chemicals including acids, solvents and bases
- Thin mil construction provides enhanced tactility and dexterity
- Extra soft material and ergonomic design for outstanding fit, feel and flexibility for longer wear time
- Lower acceptable pinhole rate (0.65 AQL) and extended cuff for reliable protection against hazardous substances
- Silicone free formulation and processing ensure better product protection




### Industries

- Aerospace
- Automotive
- Chemical
- Electronics
- Life Sciences
- Machinery and Equipment
- Metal Fabrication
- Recycling & Waste Disposal

### Applications

- Blending, compounding materials
- Handling aerospace equipment & parts
- Handling of painting tools including spray guns and robots
- Handling unexpected leaks, spills or other releases
- Maintenance and equipment clean up
- Mounting & dismantling, assembly
- Petrochemicals processing
- Routine & experimental testing
- Sample taking & lab processing
- Transferring liquid & solids

### Innovative 3 Layer Design\*

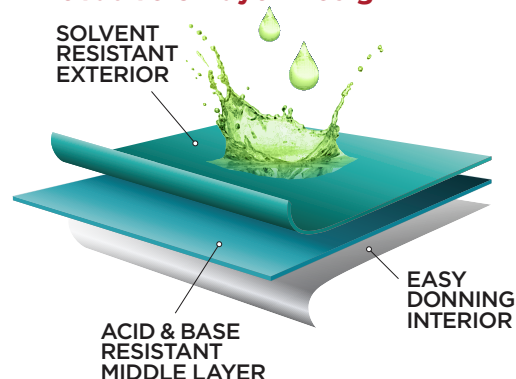

\* The method used to produce this 3 layer design is patent pending.

### TECHNICAL DATA SHEET:

#### PRODUCT INFORMATION:

	93-260
<b>Material</b>	Nitrile + Neoprene
<b>Color</b>	Green exterior, blue interior
<b>Glove Design</b>	Ambidextrous, Powder-Free, Textured fingers, Heavy Duty Product
<b>Cuff</b>	Beaded
<b>Manufacturing/QMS Audit Standards</b>	ISO 9001
<b>Regulatory/Standards Compliance</b>	COMPLIANT WITH ASTM D3577, TYPE II, PPE 89/686, EN 420, 388 & 374 CATEGORY III
<b>Packaging</b>	50 gloves per dispenser box, 10 dispenser boxes in a shipper box
<b>Storage</b>	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
<b>Country of Origin</b>	Sri Lanka
<b>User Needs Segment</b>	High Risk Glove – Extended cuff gloves to provide additional protection for the wrist and forearm.

#### PHYSICAL PROPERTIES:

	TYPICAL VALUES						TESTING METHOD
	5.5 - 6 XS	6.5 - 7 S	7.5 - 8 M	8.5 - 9 L	9.5 - 10 XL	10.5 - 11 XXL	ASTM D3767/EN 420
Length (mm/inches)	300 / 11.8	300 / 11.8	300 / 11.8	300 / 11.8	300 / 11.8	300 / 11.8	
Average Palm Width	78	89	98	111	116	122	
Freedom from Holes (Inspection level I)	0.65 AQL						ASTM D6319-10/ ASTM D5151-06 (2011)
Palm Thickness Single Wall	(mm : 0.198) / (mil : 7.8)						ASTM D3767/EN 420
	BEFORE AGING			AFTER AGING			
Ultimate Tensile Strength	22 Mpa			26 Mpa			ASTM D6319-10
Elongation at Break (%)	620			520			ASTM D6319-10
Force at break (N)	16			17			ASTM D6319-10

#### ORDERING INFORMATION:

	SIZE	5.5 - 6 XS	6.5 - 7 S	7.5 - 8 M	8.5 - 9 L	9.5 - 10 XL	10.5 - 11 XXL
93-260	REORDER NO.	93260060	93260070	93260080	93260090	93260100	93260110

For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at 1-877-750-6110

**Ansell**  
111 Wood Avenue South  
Suite 210  
Iselin, NJ 08830  
USA

**Ansell**  
105 Lauder  
Cowansville, QC J2K 2K8  
Canada

#### Performance Standards



#### Regulatory Compliance

