



**BINKS "TROPHY" SERIES
 GRAVITY FEED
 HVLP, LVMP & CONVENTIONAL
 MANUAL SPRAY GUNS**

(2466-XXXX-XXXX)

CE  II 2 G X

Binks Trophy Series Gravity Spray Gun is the premier spray gun for use in gravity feed spray applications and sets a new standard in durability, ergonomics, and atomization. The lightweight ergonomic design offers unsurpassed comfort and control. The latest advanced atomization technology has been incorporated for achieving consistent, fine finishes when spraying a wide range of industrial coating applications.

Binks Trophy Series Gravity Spray Guns are offered in three different atomization technologies: HVLP, LVMP and Conventional.



SPECIFICATIONS

The Trophy HVLP Series of Spray Guns can be used to operate at high transfer efficiencies in compliance with "California South Coast Air Quality Management District" regulations as a High Volume, Low Pressure spray gun.

| | |
|----------------------|---------------------------------|
| Maximum Air Pressure | 140 psi / 9.6 bar (P-1) |
| Gun Body | Anodized Aluminum |
| Fluid Path | Stainless Steel |
| Fluid Inlet Size | 3/8" – 19 NPS / BSP(f) |
| Air Inlet Size | 1/4" NPS / BSP(m) |
| Gun Weight | 13.8 oz. / 394 grams (less cup) |
| Wetted Parts | Stainless Steel & PTFE |

IMPORTANT! DO NOT DESTROY

It is the customer's responsibility to have all operators and service personnel read and understand this manual. Contact your local Binks representative for additional copies of this manual.

READ ALL INSTRUCTIONS BEFORE OPERATING THIS BINKS PRODUCT.

In this part sheet, the words **WARNING**, **CAUTION** and **NOTE** are used to emphasize important safety information as follows:

⚠ WARNING
 Hazards or unsafe practices which could result in severe personal injury, death or substantial property damage.

⚠ CAUTION
 Hazards or unsafe practices which could result in minor personal injury, product or property damage.

NOTE
 Important installation, operation or maintenance information.

⚠ WARNING

Read the following warnings before using this equipment.



READ THE MANUAL

Before operating finishing equipment, read and understand all safety, operation and maintenance information provided in the operation manual.



WEAR SAFETY GLASSES

Failure to wear safety glasses with side shields could result in serious eye injury or blindness.



DE-ENERGIZE, DEPRESSURIZE, DISCONNECT AND LOCK OUT ALL POWER SOURCES DURING MAINTENANCE

Failure to De-energize, disconnect and lock out all power supplies before performing equipment maintenance could cause serious injury or death.



OPERATOR TRAINING

All personnel must be trained before operating finishing equipment.




EQUIPMENT MISUSE HAZARD

Equipment misuse can cause the equipment to rupture, malfunction, or start unexpectedly and result in serious injury.



KEEP EQUIPMENT GUARDS IN PLACE

Do not operate the equipment if the safety devices have been removed.



PROJECTILE HAZARD

You may be injured by venting liquids or gases that are released under pressure, or flying debris.



PINCH POINT HAZARD

Moving parts can crush and cut. Pinch points are basically any areas where there are moving parts.



INSPECT THE EQUIPMENT DAILY

Inspect the equipment for worn or broken parts on a daily basis. Do not operate the equipment if you are uncertain about its condition.



NEVER MODIFY THE EQUIPMENT

Do not modify the equipment unless the manufacturer provides written approval.



KNOW WHERE AND HOW TO SHUT OFF THE EQUIPMENT IN CASE OF AN EMERGENCY



PRESSURE RELIEF PROCEDURE

Always follow the pressure relief procedure in the equipment instruction manual.



NOISE HAZARD

You may be injured by loud noise. Hearing protection may be required when using this equipment.



STATIC CHARGE

Fluid may develop a static charge that must be dissipated through proper grounding of the equipment, objects to be sprayed and all other electrically conductive objects in the dispensing area. Improper grounding or sparks can cause a hazardous condition and result in fire, explosion or electric shock and other serious injury.



FIRE AND EXPLOSION HAZARD

Never use 1,1,1-trichloroethane, methylene chloride, other halogenated hydrocarbon solvents or fluids containing such solvents in equipment with aluminum wetted parts. Such use could result in a serious chemical reaction, with the possibility of explosion. Consult your fluid suppliers to ensure that the fluids being used are compatible with aluminum parts.



PROP 65 WARNING

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

IT IS THE RESPONSIBILITY OF THE EMPLOYER TO PROVIDE THIS INFORMATION TO THE OPERATOR OF THE EQUIPMENT.

FOR FURTHER SAFETY INFORMATION REGARDING BINKS AND DEVILBISS EQUIPMENT, SEE THE GENERAL EQUIPMENT SAFETY BOOKLET (77-5300).

EC Declaration of Conformity

Manuf. By: Finishing Brands
 195 Internationale Blvd.
 Glendale Heights, IL 60139

Type/Series: Handheld Spray Guns

Model: Binks "Trophy" Series

The equipment to which this document relates is in conformance with the following standards or other normative references:

BS EN ISO 12100:2010 and BS EN 1953:1998 + A1:2009 and thereby conform to the protection requirements of Council Directive 2006/42/EC relating to Machinery Safety Directive, and;


BS EN 13463-1:2009, Council Directive 94/9/EC relating to Equipment and Protective Systems for use in Potentially Explosive Atmospheres, protection level II 2 G X.

Approved By: Marvin Burns Date: August 1, 2013
 Binks



Binks reserves the right to modify equipment specification without prior notice.

TYPES OF INSTALLATION

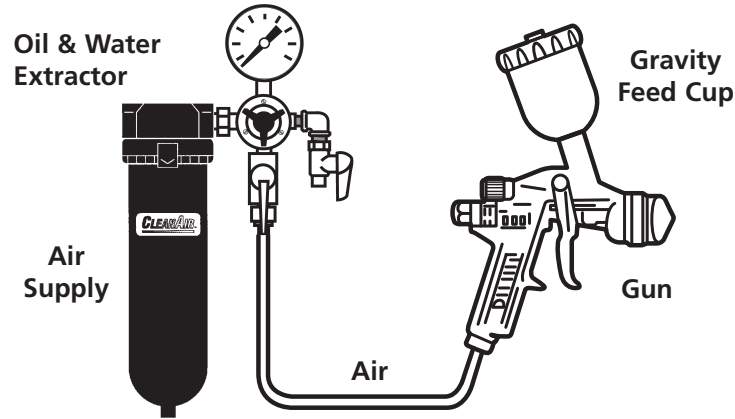

Air pressure for atomization is regulated at the extractor. The flow of the fluid is adjusted by the fluid valve control knob on gun, viscosity of paint and air pressure.

GRAVITY FEED HOOKUP

On gravity-feed spray guns the cup is located above the gun. The force of gravity pushes the fluid into the gun.


Advantages: this method offers quick color changes and convenience on small jobs or touch-up applications. Gravity spray guns are able to use all of the coating—reducing waste.

AIR PRESSURE

Atomizing pressure must be set properly to allow for the drop in air pressure between the regulator and the spray gun.

WITH 60 PSI APPLIED AT AIR SUPPLY


Cross section view showing comparison of inside hose diameters (actual size). 60 lbs. regulated pressure



5/16"

RECOMMENDED
48 PSI at gun inlet


25 feet of 5/16" I.D. hose causes a drop of 12 PSI between the air supply and the gun. For this reason Binks recommends the use of 5/16" hose.



1/4"

NOT RECOMMENDED
Only 34 PSI at gun inlet

25 feet of 1/4" I.D. hose causes a drop of 26 PSI between the air supply and the gun.




An oil and water extractor is important.


Achieving a fine spray finish without the use of a good oil and water extractor is virtually impossible.

A regulator/extractor serves a double purpose. It eliminates blistering and spotting by keeping air free of oil and water, and it gives precise air pressure control at the gun.

Use DeVilbiss oil and water extractors and regulators. See your local distributor for models.



BINKS "TROPHY" SERIES GRAVITY SPRAY GUN

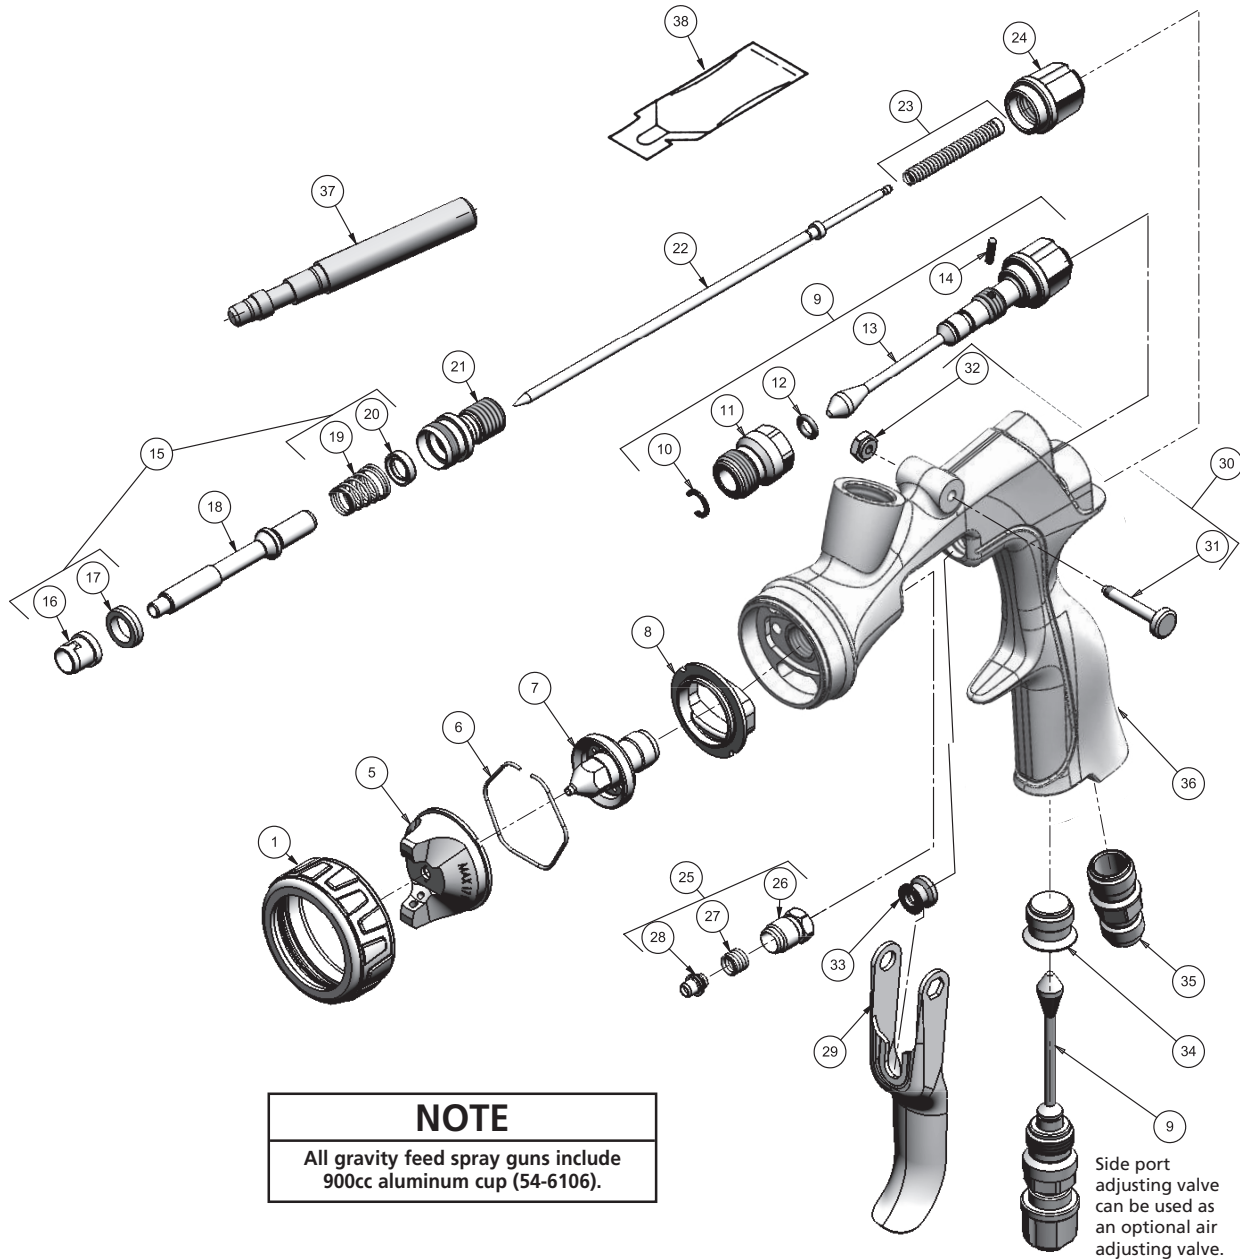

NOTE
 All gravity feed spray guns include
 900cc aluminum cup (54-6106).

Side port
 adjusting valve
 can be used as
 an optional air
 adjusting valve.

NUMBERING SYSTEM FOR FULL SIZE BINKS "TROPHY" SERIES GRAVITY SPRAY GUNS

2466 - XXXX - XXXX

GRAVITY FEED GUN

ORIFICE SIZES

- 12 1.2 MM
- 14 1.4 MM
- 16 1.6 MM
- 18 1.8 MM

ATOMIZATION TECHNOLOGY

- CN CONVENTIONAL
- LV LVMP
- HV HVLP

CUP DESIGNATION

- 0 NO CUP
- G GRAVITY CUP

NEEDLE MATERIAL

- S STAINLESS (HARDENED)

AIR CAP DESIGNATION

- 10 Series CONVENTIONAL
- 20 Series LVMP
- 30 Series HVLP

See charts on page 6 for complete gun assemblies.

CHART 1: BINKS "TROPHY" SERIES GRAVITY SPRAY GUN PARTS LIST

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | | |
|----------|----------------------|---------------------------------|------------------------|----------|-------------|-------------------------------|---------------------------|---------------|---|
| 1 | 54-6120 | AIR CAP RETAINING RING ASSEMBLY | 1 | 24 | 54-6111 | KNOB – NEEDLE ADJUSTING | 1 | | |
| 5 | SEE CHARTS ON PAGE 7 | AIR CAP | 1 | 25 | 54-6130-K | NEEDLE PACKING KIT (STANDARD) | 1 | | |
| 6 | JGA-156-K10 | SPRING-CLIP (KIT OF 10) | 1 | 26 | ----- | ■ | NUT – PACKING | 1 | |
| 7 | SEE CHARTS BELOW | FLUID NOZZLE | 1 | 27 | ----- | ■ | SPRING FOR PACKING | 1 | |
| 8 | 54-6102-K3 | BAFFLE/SEPARATOR (KIT OF 3) | 1 | 28 | ----- | □ ■ ▼ | NEEDLE PACKING (STANDARD) | 1 | |
| 9 | 54-6122 | SIDE PORT VALVE ASSEMBLY | 1 | 29 | 54-4360 | TRIGGER | 1 | | |
| 10 | ----- | + △ | RETAINING CLIP | 1 | 30 | 54-6132-K | TRIGGER SCREW NUT KIT | 1 | |
| 11 | ----- | + | BODY BUSHING | 1 | 31 | ----- | ○ | TRIGGER SCREW | 1 |
| 12 | ----- | + △ | O-RING | 1 | 32 | ----- | ○ | TRIGGER NUT | 1 |
| 13 | ----- | + | SIDE PORT STEM | 1 | 33 | 54-3513 | SPINDLE CAP | 1 | |
| 14 | ----- | + △ | PIN | 1 | 34 | SN-11 | PLUG | 1 | |
| 15 | 54-6131-K | □ | AIR VALVE SERVICE KIT | 1 | 35 | 54-6112 | FITTING – AIR INLET | 1 | |
| 16 | ----- | • | FRONT SEAL – AIR VALVE | 1 | 36 | ----- | GUN BODY WITH FLUID INLET | 1 | |
| 17 | ----- | • | FRONT AIR VALVE SEAL | 1 | 37 | ----- | TOOL – SEAL INSERTION | 1 | |
| 18 | 54-6109 | □ | AIR VALVE SPINDLE | 1 | 38 | ----- | GUNNER'S MATE (3 CC BAG) | 1 | |
| 19 | ----- | • | AIR VALVE SPRING | 1 | | | | | |
| 20 | ----- | • | REAR SEAL – AIR VALVE | 1 | | | | | |
| 21 | SN-66 | HOUSING | 1 | | | | | | |
| 22 | 47-6825 | NEEDLE – STAINLESS STEEL (STD.) | 1 | | | | | | |
| 23 | ----- | □ | SPRING/PAD ASSEMBLY | 1 | | | | | |
| | 54-6133-K3 | SPRING/PAD ASSEMBLY (KIT OF 3) | 1 | | | | | | |

| | | | |
|---|------------------------------------|---|---------------------------------|
| + | PARTS INCLUDED IN 54-6122 | ○ | PARTS INCLUDED IN 54-6132-K |
| ■ | PARTS INCLUDED IN 54-6130-K | △ | GTI-428-K5 SIDE PORT REPAIR KIT |
| ▼ | ALSO AVAILABLE IN KIT OF 3 SN-2-K3 | □ | PARTS INCLUDED IN 54-6135 |
| • | PARTS INCLUDED IN 54-6131-K | | |

**CHART 2:
STAINLESS STEEL (HARDENED)
FLUID NOZZLES – STD.**

| STAINLESS FLUID NOZZLE ORIFICE SIZE | FLUID NOZZLE PART NUMBER |
|-------------------------------------|--------------------------|
| .039" | 1.0 mm 45-11050-10 |
| .047" | 1.2 mm 45-11050-12 |
| .055" | 1.4 mm 45-11050-14 |
| .063" | 1.6 mm 45-11050-16 |
| .071" | 1.8 mm 45-11050-18 |

**CHART 3:
TEST AIR CAP KITS –
OPTIONAL**

| CONVENTIONAL | |
|--------------|-----------------|
| 54-6141-K | 12-C KIT |
| LVMP | |
| 54-6147-K | 23-L KIT |
| HVLP | |
| 54-6152-K | 32-H KIT – HVLP |

BINKS "TROPHY" SERIES GRAVITY SPRAY GUN NEEDLE AND NOZZLE SELECTION GUIDE

CHART 4: CONVENTIONAL GUN SET-UPS

| TYPE OF FLUID TO BE SPRAYED | COMPLETE GUN ASSEMBLY PART NUMBER | FLUID NOZZLE AND AIR CAP |
|--|-----------------------------------|--------------------------|
| THIN 5-25 CENTIPOISE 15-19 sec. Zahn 2 cup wash primers, dyes, stains, solvents, water, inks, sealers, laquers, lubricants, zinc chromates, acrylics | 2466-14CN-12SG | 1.4 mm (.055") X 12C |
| | 2466-16CN-12SG | 1.6 mm (.063") X 12C |
| MEDIUM 25-70 CENTIPOISE 20-30 sec. Zahn 2 cup synthetic enamels, varnishes, shellacs, fillers, primers, epoxies, urethanes, lubricants, wax emulsions, enamels | 2466-16CN-12SG | 1.6 mm (.063") X 12C |
| | 2466-18CN-12SG | 1.8 mm (.070") X 12C |

CHART 5: LVMP GUN SET-UPS

| TYPE OF FLUID TO BE SPRAYED | COMPLETE GUN ASSEMBLY PART NUMBER | FLUID NOZZLE AND AIR CAP |
|--|-----------------------------------|--------------------------|
| THIN 5-25 CENTIPOISE 15-19 sec. Zahn 2 cup wash primers, dyes, stains, solvents, water, inks, sealers, laquers, lubricants, zinc chromates, acrylics | 2466-12LV-23SG | 1.2 mm (.067") X 23L |
| | 2466-14LV-23SG | 1.4 mm (.055") X 23L |
| MEDIUM 25-70 CENTIPOISE 20-30 sec. Zahn 2 cup synthetic enamels, varnishes, shellacs, fillers, primers, epoxies, urethanes, lubricants, wax emulsions, enamels | 2466-14LV-23SG | 1.4 mm (.055") X 23L |
| | 2466-18LV-23SG | 1.8 mm (.070") X 23L |

CHART 6: HVLP GUN SET-UPS

| TYPE OF FLUID TO BE SPRAYED | COMPLETE GUN ASSEMBLY PART NUMBER | FLUID NOZZLE AND AIR CAP |
|--|-----------------------------------|--------------------------|
| THIN 5-25 CENTIPOISE 15-19 sec. Zahn 2 cup wash primers, dyes, stains, solvents, water, inks, sealers, laquers, lubricants, zinc chromates, acrylics | 2466-12HV-32SG | 1.2 mm (.047") X 32H |
| | 2466-14HV-32SG | 1.4 mm (.055") X 32H |
| MEDIUM 25-70 CENTIPOISE 20-30 sec. Zahn 2 cup synthetic enamels, varnishes, shellacs, fillers, primers, epoxies, urethanes, lubricants, wax emulsions, enamels | 2466-14HV-32SG | 1.4 mm (.055") X 32H |
| | 2466-18HV-32SG | 1.8 mm (.070") X 32H |

BINKS "TROPHY" SERIES GRAVITY SPRAY GUN AIR CAP AND FLUID NOZZLE SELECTION CHARTS

| CHART 7: CONVENTIONAL AIR CAP AND FLUID NOZZLE SELECTION CHART | | | | | | | |
|--|------------------|---------------------|--------------|--------------|--------------|-------------------------------------|--|
| Air Cap | Air Cap Part No. | Spray Pattern Range | CFM @ 30 PSI | CFM @ 50 PSI | CFM @ 70 PSI | Fluid Nozzle | Typical Coatings |
| 12-C | 46-6501 | 4 – 12" | 8.3 | 12.1 | 14.2 | 45-11050 series, 1.2 mm – 1.8 mm | Lacquers, Enamels, Top Coats, Low Viscosity Adhesives |

| CHART 8: LVMP – LOW VOLUME MEDIUM PRESSURE AIR CAP AND FLUID NOZZLE SELECTION CHART | | | | | |
|---|------------------|---------------------|---------------------------------|-------------------------------------|--|
| Air Cap | Air Cap Part No. | Spray Pattern Range | CFM @30 PSI Gun Inlet (Dynamic) | Fluid Nozzle | Typical Coatings |
| 23-L | 46-6511 | 4 – 12" | 10.6 | 45-11050 series, 1.2 mm – 1.8 mm | Lacquers, Enamels, Top Coats, Low Viscosity Adhesives |
| 24-L | 46-6512 | 2 – 6" | 14.3 | 45-11050 series, 1.0 mm – 1.8 mm | Small Pattern Applications of Stains, Lacquers, Enamels, Acrylics |

| CHART 9: HVLP – HIGH VOLUME LOW PRESSURE AIR CAP AND FLUID NOZZLE SELECTION CHART | | | | | | |
|---|------------------|---------------------|--------------------------------------|---|-------------------------------------|---|
| Air Cap | Air Cap Part No. | Spray Pattern Range | SCFM @ 10 PSI Cap Pressure (Dynamic) | Gun Inlet PSI @ 10 PSI at Air Cap (Dynamic) | Fluid Nozzle | Typical Coatings |
| 32-H | 46-6518 | 8 – 14" | 15.5 | 26 | 45-11050 series, 1.2 mm – 1.8 mm | Lacquers, Enamels, Multi-Colors, Multi-Spec, Nonstick Coatings, Cut-Latex |

| CHART 10: ROUND SPRAY AIR CAP AND FLUID NOZZLE SELECTION CHART (OPTIONAL) | | | | | | | |
|---|------------------|---------------------|--------------|--------------|--------------|-------------------------------------|-------------------|
| Air Cap | Air Cap Part No. | Spray Pattern Range | CFM @ 30 PSI | CFM @ 50 PSI | CFM @ 70 PSI | Fluid Nozzle | Typical Coatings |
| 16 | 46-6505 | 2 – 4" | 5.6 | 7.8 | 10.5 | 45-11050 series, 1.2 mm – 1.8 mm | Lacquers, Enamels |

INSTALLATION INSTRUCTIONS

For maximum transfer efficiency, do not use more pressure than is necessary to atomize the material being applied.

NOTE

When using HVLP do not exceed inlet pressures listed on page 7.

1. Connect the gun to a clean, moisture and oil free air supply using a conductive hose of at least 5/16 in I.D.

NOTE

Depending on hose length, larger I.D. hose may be required. Install an air gauge at the gun handle. See page 7 for operating pressures. Do not use more pressure than is necessary to atomize the material being applied. Excess pressure will create additional overspray and reduce transfer efficiency.

NOTE

If quick connect couplings are required, use only high flow quick connects approved for HVLP use. Other types will not flow enough air for correct gun operation.

NOTE

If an air adjusting valve is used at the gun inlet, use HAV-501 adjusting valve.

NOTE

Before using the spray gun, flush it with solvent to ensure that the fluid passages are clean.

OPERATION

GRAVITY MODELS

1. Mix coating material to manufacturer's instructions and strain material.
2. Fill the cup to no more than 3/4 inch from the top of the cup. DO NOT OVERFILL.
3. Attach to cup lid.
4. Turn fluid adjusting knob (24) clockwise to prevent fluid needle movement.
5. Turn sideport control (9) counter clockwise to fully open.
6. Adjust inlet air pressure if required.
7. Turn fluid adjusting knob counter clockwise until first thread shows.
8. Test spray. If the finish is too dry, reduce airflow by reducing air inlet pressure.

9. If finish is too wet, reduce fluid flow by turning fluid adjusting knob (24) clockwise. If atomization is too coarse, increase inlet air pressure. If too fine, reduce inlet pressure.
10. The pattern size can be reduced by turning sideport control (9) clockwise.
11. Hold gun perpendicular to surface being sprayed. Arcing or tilting may result in uneven coating.
12. The recommended spray distance is 8 inches.
13. Spray edges first. Overlap each stroke a minimum of 75%. Move gun at a constant speed.
14. Always turn off air supply and relieve pressure when gun is not in use.

PREVENTIVE MAINTENANCE AND CLEANING

To clean air cap and fluid nozzle, brush exterior with a stiff bristle brush. If necessary to clean cap holes, use a broom straw or toothpick if possible. If a wire or hard instrument is used, extreme care must be used to prevent scratching or burring of the holes which will cause a distorted spray pattern.

To clean fluid passages, remove excess material from gun, then flush with gun wash solution. Wipe the gun exterior with a dampened cloth. Never completely immerse in any solvent or cleaning solutions as this is detrimental to the lubricants and life of the spray gun.

NOTE

When replacing the fluid nozzle (7) or fluid needle (22), replace both at the same time. Using worn parts can cause fluid leakage. See page 4. Also, replace the needle packing at this time. Torque the fluid nozzle to 230–240 inch-lbs. Do not over tighten.


CAUTION

To prevent damage to fluid nozzle (7) or fluid needle (22), be sure to either 1) pull the trigger and hold while tightening or loosening the fluid nozzle, or 2) remove fluid adjusting knob (24) to relieve spring pressure against needle collar.









GRAVITY CUP. Empty excess material and clean the cup. Make sure the vent hole in the lid is clear.

REMOVAL AND INSTALLATION PROCEDURES








NEEDLE AND VALVE DISASSEMBLY AND ASSEMBLY

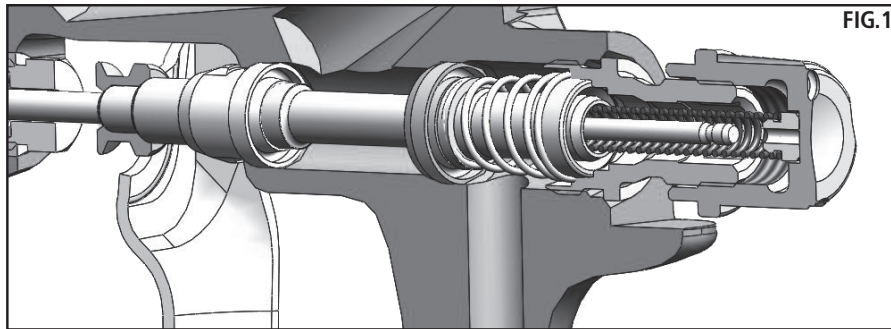









DISASSEMBLY

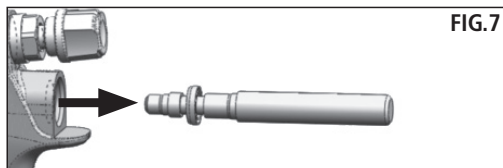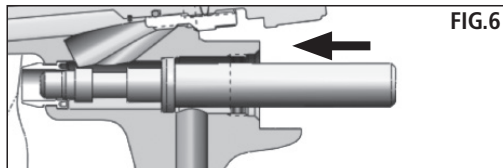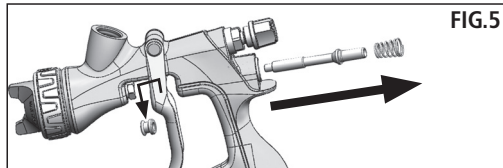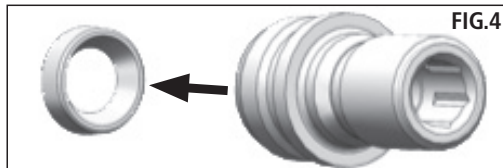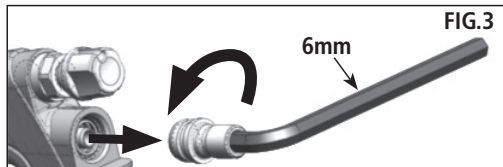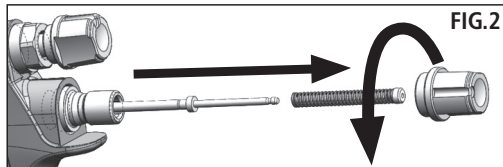




ASSEMBLY

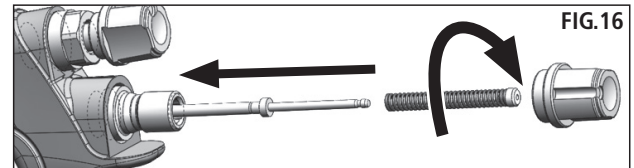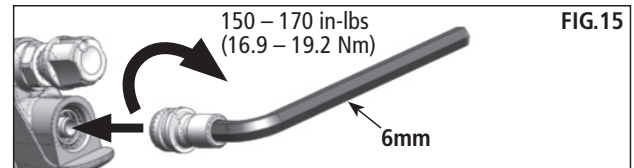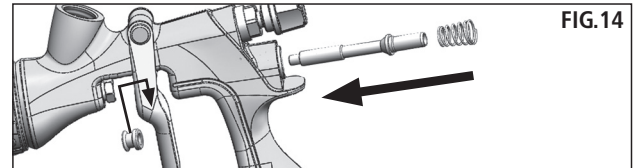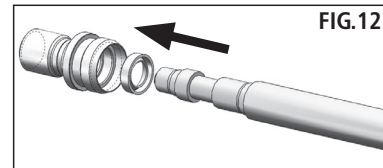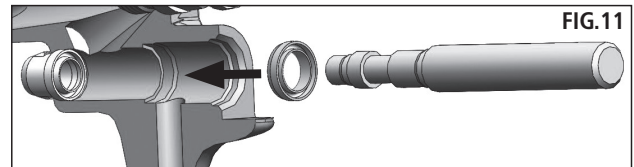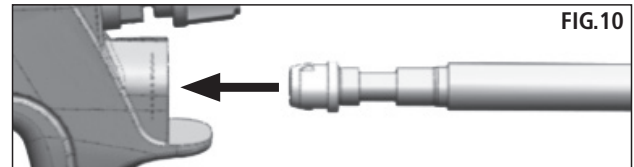







MAINTENANCE – FLUID NOZZLE AND BAFFLE REMOVAL AND INSTALLATION

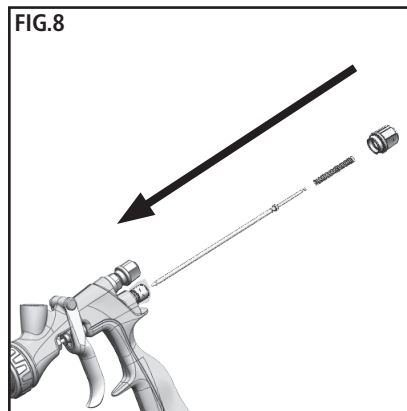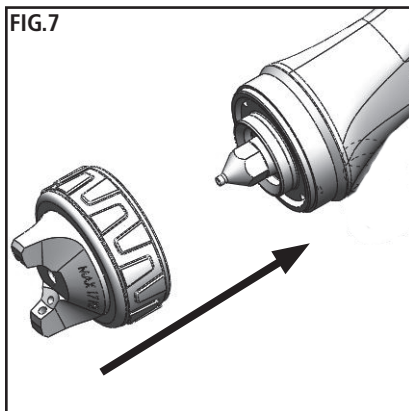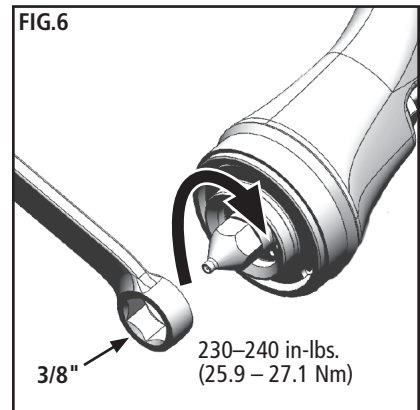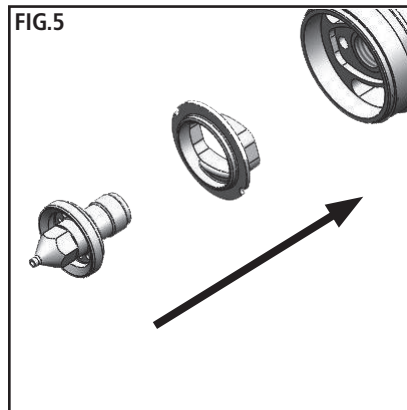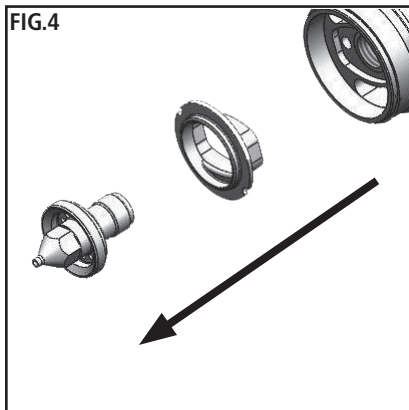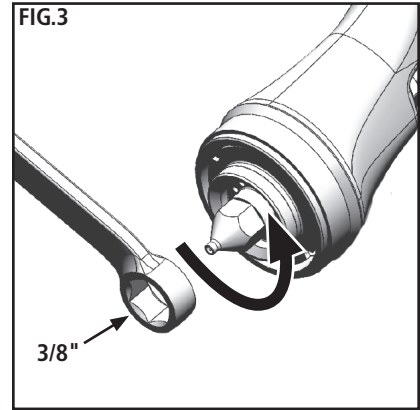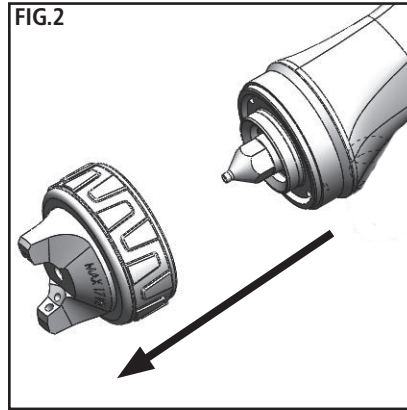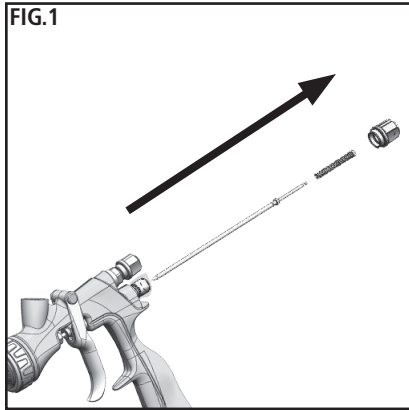







AIR CAP INDEX PIN (54-6184) INSTALLATION (OPTIONAL – 90° INCREMENTS INDEXING FEATURE)

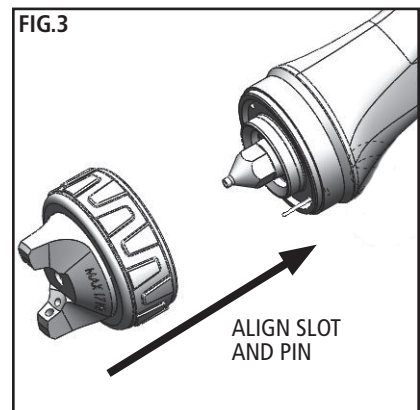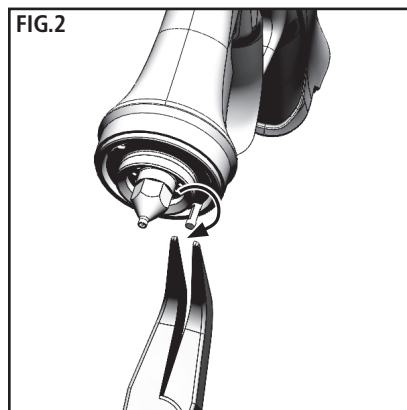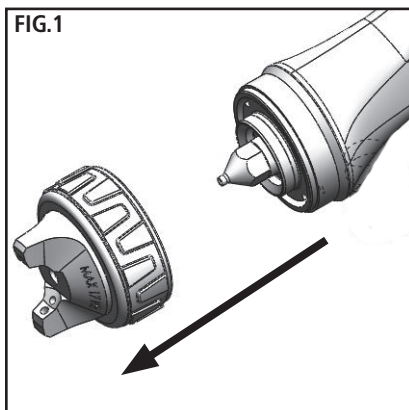



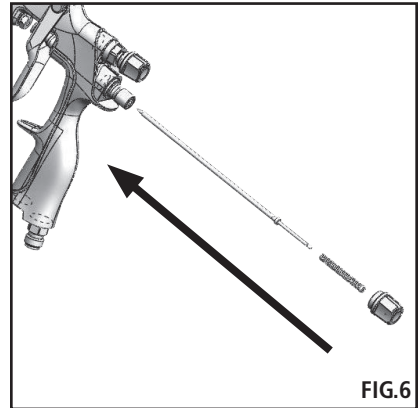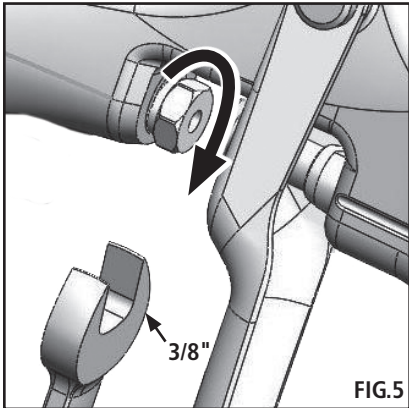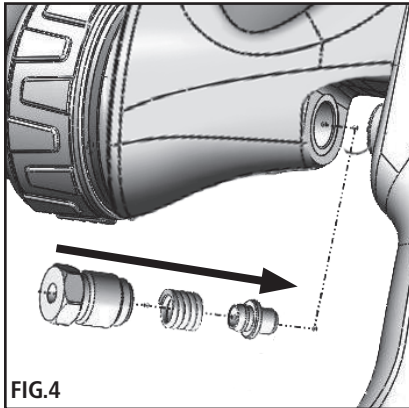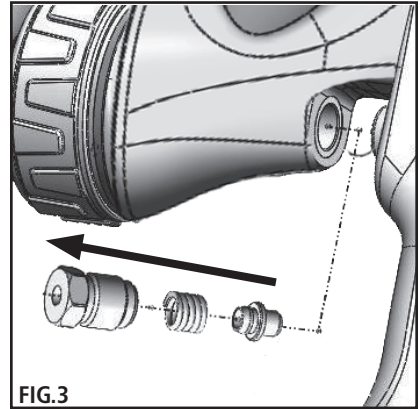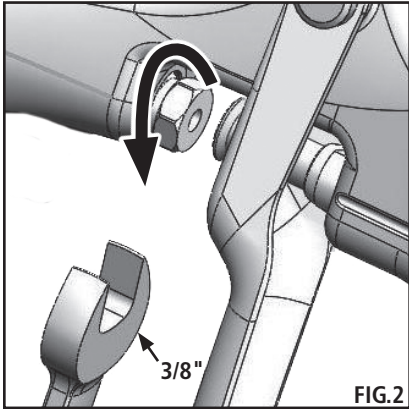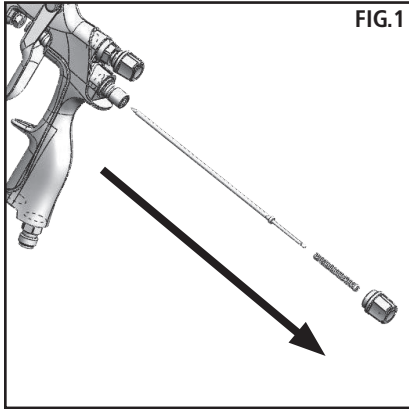


MAINTENANCE – NEEDLE PACKING REMOVAL AND INSTALLATION

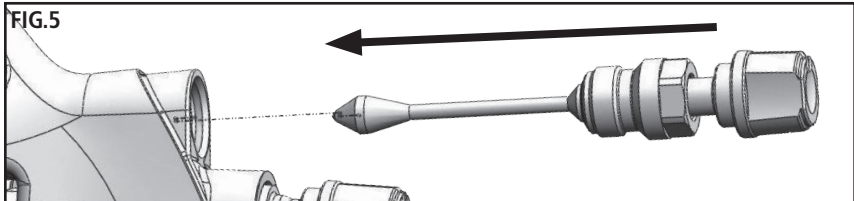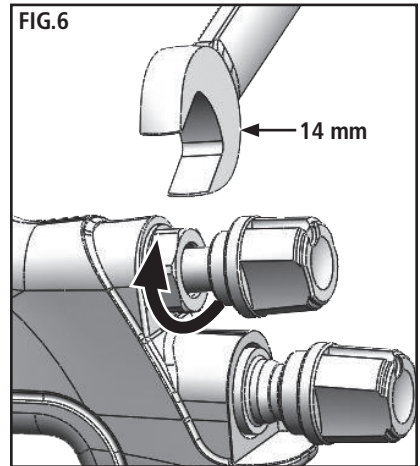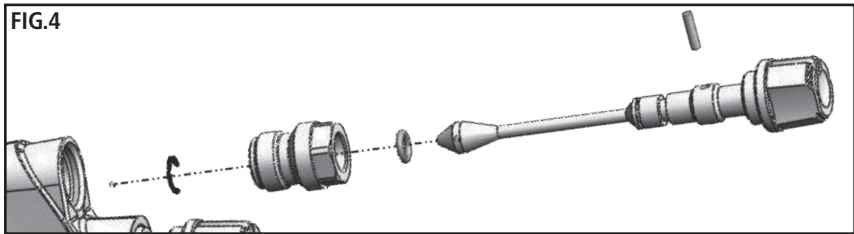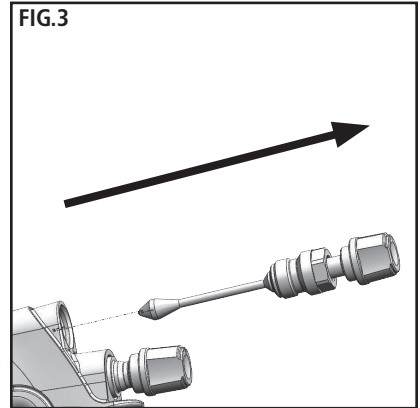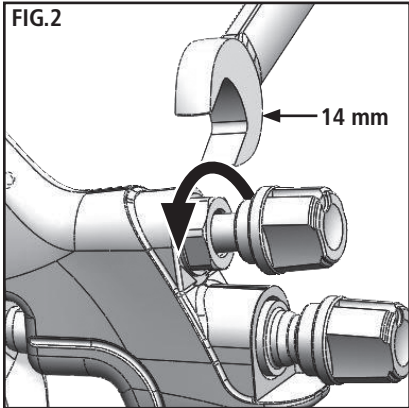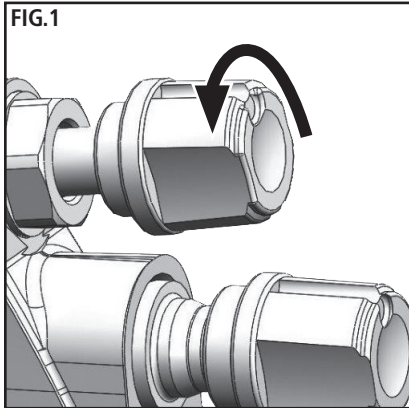

MAINTENANCE – SIDEPORT REMOVAL AND INSTALLATION



TROUBLESHOOTING

| CONDITION | CAUSE | CORRECTION |
|---|--|--|
| Heavy top or bottom pattern  | Horn holes plugged. Obstruction on top or bottom of fluid tip. Cap and/or tip seat dirty. | Clean. Ream with non-metallic point. Clean. Clean. |
| Heavy right or left side pattern  | Left or right side horn holes plugged. Dirt on left or right side of fluid tip. | Clean. Ream with non-metallic point. Clean. |
| | Remedies for the top-heavy, bottom-heavy, right-heavy, and left-heavy patterns: 1. Determine if the obstruction is on the air cap or the fluid tip. Do this by making a test spray pattern. Then, rotate the cap one-half turn and spray another pattern. If the defect is inverted, obstruction is on the air cap. Clean the air cap as previously instructed. 2. If the defect is not inverted, it is on the fluid tip. Check for a fine burr on the edge of the fluid tip. Remove with #600 wet or dry sand paper. 3. Check for dried paint just inside the opening; remove by washing with solvent. | |
| Heavy center pattern  | Fluid flow too high for atomization air. Material flow exceeds air cap's capacity. Spreader adjustment valve set too low. Atomizing pressure too low. Material too thick. | Balance air pressure and fluid flow. Increase spray pattern width with spreader adjustment valve. Thin or lower fluid flow. Adjust. Increase pressure. Thin to proper consistency. |
| Split spray pattern  | Atomization air pressure too high. Fluid flow too low. Spreader adjusting valve set too high. | Reduce at transformer or gun. Increase fluid flow (increases gun handling speed). Adjust. |
| Jerky or fluttering spray  | *Loose or damaged fluid tip/seat. Material level too low. Container tipped too far. Obstruction in fluid passage. Dry or loose fluid needle packing nut. | Tighten or replace. Refill. Hold more upright. Backflush with solvent. Lubricate or tighten. |
| Unable to get round spray | Spreader adjustment screw not seating properly. Air cap retaining ring loose. | Clean or replace. Tighten. |
| Will not spray | No air pressure at gun. Fluid needle adjusting screw not open enough. Fluid too heavy for gravity feed. | Check air supply and air lines, blow out gun air passages. Open fluid needle adjusting screw. Thin material and/or change to larger tip size. |
| Paint bubbles in cup | Fluid tip not tight. | Tighten tip. |
| Fluid leaking or dripping from cup lid | Cup lid loose. Dirty threads on cup or lid. Cracked cup or lid. | Tighten lid. Clean. Replace cup and lid. |


*Most common problem.

TROUBLESHOOTING

| CONDITION | CAUSE | CORRECTION |
|---|---|--|
| Starved spray pattern | Inadequate material flow. Low atomization air pressure. | Back fluid adjusting screw out to first thread, or change to larger tip size. Increase air pressure and rebalance gun. |
| Excessive overspray | Too much atomization air pressure. Gun too far from work surface. Improper stroking (arcing, gun motion too fast). | Reduce pressure. Adjust to proper distance. Move at moderate pace, parallel to work surface. |
| Excessive fog | Too much or too fast-drying thinner. Too much atomization (air pressure.) | Remix properly. Reduce air pressure. |
| Dry spray | Air pressure too high. Gun tip too far from work surface. Gun motion too fast. Gun out of adjustment. | Reduce air pressure. Adjust to proper distance. Slow down. Adjust. |
| Fluid leaking from packing nut | Packing nut loose. Packing worn or dry. | Tighten, do not bind needle. Replace or lubricate. |
| Fluid leaking or dripping from front of gun | Packing nut too tight. Dry packing. Fluid tip or needle worn or damaged. Foreign matter in tip. Fluid needle spring broken. Wrong size needle or tip. | Adjust. Lubricate. Replace tip and needle. Clean. Replace. Replace. |
| Fluid dripping or leaking from bottom of cup | Cup loose on gun. Cup gasket worn or missing below cup. Cup threads dirty. | Tighten. Replace cup gasket. Clean. |
| Runs and sags | Too much material flow. Material too thin. Gun tilted on an angle, or gun motion too slow. | Adjust gun or reduce fluid flow. Mix properly or apply light coats. Hold gun at right angle to work and adapt to proper gun technique. |
| Thin, sandy coarse finish drying before it flows out | Gun too far from surface. Too much air pressure. Improper thinner being used. | Check distance. Normally approximately 8". Reduce air pressure and check spray pattern. Follow paint manufacturer's mixing instructions. |
| Thick, dimpled finish "orange peel" | Gun too close to surface. Too much material coarsely atomized. Air pressure too low. Improper thinner being used. Material not properly mixed. Surface rough, oily, dirty. | Check distance. Normally approximately 8". Follow paint manufacturer's mixing instructions. Increase air pressure or reduce fluid flow. Follow paint manufacturer's mixing instructions. Follow paint manufacturer's mixing instructions. Follow paint manufacturer's mixing instructions. Properly clean and prepare. |

ACCESSORIES

HAF-507-K12 Whirlwind™ In-Line Air Filter Kit of 12




Removes water, oil, and debris from the air line.

192212 Professional Spray Gun Cleaning Kit




Contains six precision tools designed to effectively clean all DeVilbiss, Binks, Finishline and other brand spray guns.

6-429 Binks Gunners Mate Lube (Twenty 2 oz. bottles)




Compatible with all paint materials; contains no silicone or petroleum distillates to contaminate paint. MSDS available upon request.

HAV-500 OR HAV-501 Adjusting Valve (HAV-501 SHOWN)



HAV-500 does not have pressure gauge. Use to control air usage at gun.


Millennium 3000 Twin Cartridge Paint Spray Respirator



NIOSH-Certified, for respiratory protection in atmospheres not immediately dangerous to life.

| | | |
|-----------------|------------------|-----------------|
| Small 40-141 | Medium 40-128 | Large 40-143 |
|-----------------|------------------|-----------------|

Quick Connects for HVLP Guns (Air) High Flow Type



HC-4419 Stem
1/4" NPT(F)
Gun End


HC-4719 Coupler
1/4" NPT(M)
Hose End

29-3100 Scrubs® Hand Cleaner Towels




Scrubs® are a premoistened hand cleaner towel for painters, body men and mechanics that go where you go and no water is needed.

54-6106 1 Qt. Gravity Cup (Aluminum)




192219 Gun Holder

Gun holder made to hold guns with gravity cups.




KGP-13-K5 Cup Gasket












Fluid inlet gasket necessary for use with metal gravity cups.



54-6197 Needle Adjustment Stop



DeKups® Accessories for gravity feed cups

| | | | | | |
|---|---|---|---|--|---|
| DPC-60-K10 9oz Universal x10 | DPC-59-K10 24oz Universal x10 | DPC-61-K10 34oz Universal x10 | 125 µm DPC-42-K24 x24 | 200 µm DPC-66-K24 x24 | DPC-6-K10 x10 |
|  |  |  | 125 µm DPC-65-K24 x24 | 200 µm DPC-67-K24 x24 |  |
|  |  |  |  |  |  |
| DPC-607 x2 | DPC-606 x2 | DPC-608 x2 | 9 FL 265 mL DPC-602 x32 | 24 FL 710 mL DPC-601 x32 | DPC-44 |
| SHELLS | | | LINERS | | |
| | | | |  | DPC-31 |
| | | | | 34 FL 1000 mL DPC-600 x32 | |

NOTES

WARRANTY POLICY

Binks products are covered by Finishing Brands one year materials and workmanship limited warranty. The use of any parts or accessories, from a source other than Finishing Brands, will void all warranties. For specific warranty information please contact the closest Finishing Brands location listed below.

Finishing Brands reserves the right to modify equipment specifications without prior notice. DeVilbiss®, Ransburg®, BGK®, and Binks® are registered trademarks of Carlisle Fluid Technologies, Inc., dba Finishing Brands. ©2015 Carlisle Fluid Technologies, Inc., dba Finishing Brands. All rights reserved.



Binks is part of Finishing Brands, a global leader in innovative spray finishing technologies. For technical assistance or to locate an authorized distributor, contact one of our international sales and customer support locations below.

USA/Canada

www.binks.com
info@finishingbrands.com
Tel: 1-800-992-4657
Fax: 1-888-246-5732

Mexico

www.finishingbrands.com.mx
sales@finishingbrands.com.mx
Tel: 011 52 55 5321 2300
Fax: 011 52 55 5310 4790

Brazil

www.devilbiss.com.br
sales@devilbiss.com.br
Tel: +55 11 5641 2776
Fax: 55 11 5641 1256

United Kingdom

www.finishingbrands.eu
info@finishingbrands.eu
Tel: +44 (0)1202 571 111
Fax: +44 (0)1202 573 488

France

www.finishingbrands.eu
info@finishingbrands.eu
Tel: +33(0)475 75 27 00
Fax: +33(0)475 75 27 59

Germany

www.finishingbrands.eu
info@finishingbrands.eu
Tel: +49 (0) 6074 403 1
Fax: +49 (0) 6074 403 281

China

www.finishingbrands.com.cn
mkt@finishingbrands.com.cn
Tel: +8621-3373 0108
Fax: +8621-3373 0308

Japan

www.ransburg.co.jp
binks-devilbiss@ransburg.co.jp
Tel: 081 45 785 6421
Fax: 081 45 785 6517

Australia

www.finishingbrands.com.au
sales@finishingbrands.com.au
Tel: +61 (0) 2 8525 7555
Fax: +61 (0) 2 8525 7500

